

IMPACT OF RESERVOIR-DEVELOPMENT ALTERNATIVES ON STREAMFLOW QUANTITY IN THE YAMPA RIVER BASIN, COLORADO AND WYOMING

U. S. GEOLOGICAL SURVEY



Water-Resources Investigations 80-113

Prepared in cooperation with the
U.S. Fish and Wildlife Service



REPORT DOCUMENTATION PAGE	1. REPORT NO.	2.	3. Recipient's Accession No.
4. Title and Subtitle IMPACT OF RESERVOIR-DEVELOPMENT ALTERNATIVES ON STREAMFLOW QUANTITY IN THE YAMPA RIVER BASIN, COLORADO AND WYOMING			5. Report Date March 1982
7. Author(s) Jack E. Veenhuis and Donald E. Hillier			8. Performing Organization Rept. No. USGS/WRI 80-113
9. Performing Organization Name and Address U.S. Geological Survey Water Resources Division Box 25046, Mail Stop 415 Denver Federal Center Lakewood, CO 80225			10. Project/Task/Work Unit No.
			11. Contract(C) or Grant(G) No. (C) (G)
12. Sponsoring Organization Name and Address U.S. Geological Survey Water Resources Division Box 25046, Mail Stop 415 Denver Federal Center Lakewood, CO 80225			13. Type of Report & Period Covered Final
15. Supplementary Notes			14.
<p>16. Abstract (Limit: 200 words) In the Yampa River basin, Colorado-Wyoming, 35 major reservoirs and 2 transmountain diversions have been proposed to provide additional water for increasing uses. A multireservoir-flow computer model was used to simulate effects on streamflow of five potential options--one representing historical conditions and four representing various degrees of reservoir and transmountain-diversion development. Various combinations of 17 proposed reservoirs and 2 transmountain diversions were used. Varying percentages (25, 50, 75, and 100 percent) of hypothetical agricultural and transmountain diversions within each proposed reservoir-development option were simulated for different degrees of water use, providing results for alternatives.</p> <p>The proposed Vidler transmountain diversion would affect streamflow only in the Yampa River subbasin while the proposed addition to the Hog Park transmountain diversion would affect streamflow primarily in the Little Snake River subbasin. Streamflow in the Yampa River tributaries could be relatively unaffected by the Vidler transmountain diversion, although streamflow could be affected to some degree in all reaches of the Yampa River downstream from the proposed diversion site.</p> <p>More uniform flow regimens during the year could result from some proposed options. However, existing (1979) minimum streamflows would not be maintained in many instances, and for many months, with the larger percentage of water-use allocation, there could be no streamflow.</p>			
<p>17. Document Analysis a. Descriptors</p> <p>Reservoir simulation, Reservoir development, Routing, Simulation, Computer model, Minimum flow, Instream flow</p> <p>b. Identifiers/Open-Ended Terms</p> <p>Yampa River, Little Snake River, Colorado</p> <p>c. COSATI Field/Group</p>			
18. Availability Statement: No restriction on distribution		19. Security Class (This Report)	21. No. of Pages 81
		20. Security Class (This Page)	22. Price

IMPACT OF RESERVOIR-DEVELOPMENT ALTERNATIVES ON STREAMFLOW
QUANTITY IN THE YAMPA RIVER BASIN, COLORADO AND WYOMING

By Jack E. Veenhuis and Donald E. Hillier

U.S. GEOLOGICAL SURVEY

Water-Resources Investigations 80-113

Prepared in cooperation with the
U.S. FISH AND WILDLIFE SERVICE

Lakewood, Colorado

1982



UNITED STATES DEPARTMENT OF THE INTERIOR

JAMES G. WATT, Secretary

GEOLOGICAL SURVEY

Dallas L. Peck, Director

For additional information write to:

Colorado District Chief, WRD
U.S. Geological Survey
Box 25046, Mail Stop 415
Denver Federal Center
Lakewood, CO 80225

CONTENTS

	Page
Abstract-----	1
Introduction-----	1
Model description-----	3
Data availability-----	4
Streamflow records-----	4
Precipitation records-----	4
Evaporation records-----	4
Consumptive use and existing surface-water diversions-----	9
Reservoir geometry-----	9
Alternative reservoir configurations studied-----	9
Proposed diversions used in the model-----	11
Agricultural diversions-----	12
Industrial and municipal diversions-----	12
Transmountain diversions-----	12
Model verification-----	14
Model simulations-----	14
Model results-----	18
Summary-----	69
Selected references-----	71

ILLUSTRATIONS

	Page
Figure 1. Map showing location of some representative proposed reservoirs and control points used in multireservoir-modeling analysis----	2
2. Map showing location of streamflow-gaging and climatological stations having records used in multireservoir-modeling analysis-----	5
3. Graph showing periods of record for streamflow data used in the multireservoir-modeling analysis-----	6
4-6. Graphs showing simulated and measured mean annual streamflow at:	
4. Control point 39, Yampa River at Steamboat Springs, Colo., 1927-76 water years-----	15
5. Control point 18, Yampa River near Maybell, Colo., 1927-76 water years-----	16
6. Control point 42, Little Snake River near Lily, Colo., 1927-76 water years-----	17

TABLES

	Page
Table 1. Monthly evaporation rates used for reservoirs in the Yampa River basin-----	8
2. Assumed monthly schedules for proposed and existing agricultural diversions-----	10
3. Proposed reservoirs used in model analysis-----	11

CONTENTS--Continued

	Page
Tables:	
4. Proposed and existing monthly diversions for industrial and municipal use-----	13
5. Assumed monthly schedules for transmountain diversions-----	13
6. Control points for which results of model simulations are presented--	19
7. Summary of monthly streamflows, control point 39 (Yampa River at Steamboat Springs, Colo.), for simulated historical conditions, including 100 percent of transmountain diversions, and for historical conditions-----	20
8-11. Summary of simulated historical monthly streamflows, control point 39 (Yampa River at Steamboat Springs, Colo.):	
8. With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	21
9. With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	22
10. With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	23
11. With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	24
12. Summary of monthly streamflows, control point 38 (Elk River near Trull, Colo.), for simulated historical conditions, including 100 percent of transmountain diversions, and for historical conditions-----	25
13-16. Summary of simulated historical monthly streamflows, control point 38 (Elk River near Trull, Colo.):	
13. With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	26
14. With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	27
15. With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	28
16. With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	29

CONTENTS--Continued

Page

Tables:

17-21.	Summary of simulated historical monthly streamflows, control point 34 (Trout Creek at mouth):	
17.	For historical conditions and with 100 percent of transmountain diversions-----	31
18.	With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	32
19.	With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	33
20.	With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	34
21.	With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	35
22-26.	Summary of simulated historical monthly streamflows, control point 15 (Yampa River at Craig, Colo.):	
22.	For historical conditions and with 100 percent of transmountain diversions-----	36
23.	With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	37
24.	With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	38
25.	With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	39
26.	With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	40
27-31.	Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek):	
27.	For simulated historical conditions and with 100 percent of transmountain diversions-----	41
28.	With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	42

CONTENTS--Continued

	Page
Tables:	
27-31. Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek)--Continued:	
29. With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	43
30. With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	44
31. With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	45
32. Summary of monthly streamflows, control point 18 (Yampa River near Maybell, Colo.), for simulated historical conditions, including 100 percent of transmountain diversions, and for historical conditions-----	46
33-36. Summary of simulated historical monthly streamflows, control point 18 (Yampa River near Maybell, Colo.):	
33. With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	47
34. With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	48
35. With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	49
36. With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	50
37-41. Summary of simulated historical monthly streamflows, control point 19 (Yampa River near Lily, Colo.):	
37. For historical conditions and with 100 percent of transmountain diversions-----	52
38. With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	53
39. With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	54

CONTENTS--Continued

Page

Tables

37-41.	Summary of simulated historical monthly streamflows, control point 19 (Yampa River near Lily, Colo.)--Continued:	
40.	With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	55
41.	With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	56
42.	Summary of monthly streamflows, control point 43 (Little Snake River near Baggs, Wyo.), for simulated historical conditions, including 100 percent of transmountain diversions, and for historical conditions-----	58
43-46.	Summary of simulated historical monthly streamflows, control point 43 (Little Snake River near Baggs, Wyo.):	
43.	With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	59
44.	With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	60
45.	With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	61
46.	With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	62
47-51.	Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.):	
47.	For historical conditions and with 100 percent of transmountain diversions-----	63
48.	With 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	64
49.	With 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	65

CONTENTS--Continued

	Page
Tables:	
47-51. Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.)--Continued:	
50. With 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	66
51. With 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations--	67

METRIC CONVERSIONS

inch (in.)	25.40	millimeter
mile (mi)	1.609	kilometer
acre-foot (acre-ft)	0.001233	cubic hectometer
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second

IMPACT OF RESERVOIR-DEVELOPMENT ALTERNATIVES ON STREAMFLOW QUANTITY IN THE YAMPA RIVER BASIN, COLORADO AND WYOMING

By Jack E. Veenhuis and Donald E. Hillier

ABSTRACT

In the Yampa River basin of Colorado and Wyoming, a total of 35 major reservoirs and 2 transmountain diversions has been proposed for construction to provide additional water for increasing industrial, irrigation, and municipal uses. A multireservoir-flow computer model was used to simulate the effects on streamflow of five potential options, including one representing historical conditions and four representing various degrees of reservoir and transmountain-diversion development. Various combinations of 17 proposed reservoirs and the 2 transmountain diversions were used in the analysis. By varying the percentages (25, 50, 75, and 100 percent) of hypothetical agricultural and transmountain diversions within each proposed reservoir-development option studied, different degrees of water-use allocation were simulated, thus providing results for a greater range of alternatives. The results of these simulations provide water managers and planners with some insight into how proposed surface-water developments will affect streamflow.

The proposed Vidler transmountain diversion would affect streamflow only in the Yampa River subbasin while the proposed addition to the Hog Park transmountain diversion would affect streamflow primarily in the Little Snake River subbasin. Streamflow in tributaries to the Yampa River could be relatively unaffected by the Vidler transmountain diversion although streamflow could be affected to some degree in all reaches of the Yampa River downstream from the proposed diversion site.

More uniform flow regimens throughout the year could result from some of the proposed reservoir-development options. However, existing (1979) minimum streamflows would not be maintained in many instances, and for many months with the larger percentage of water-use allocations there could be no streamflow.

INTRODUCTION

Historically, the principal use of surface water in the Yampa River basin (fig. 1) has been for irrigation of hay meadows and wheat fields. However, increased energy and economic development in the basin will result in additional use of surface water for industrial, municipal, and recreational purposes. Because only 54,000 acre-ft of reservoir storage (Steele and others, 1979) is currently (1979) available in the basin, the construction of numerous reservoirs in the basin has been proposed as a means of providing additional surface water. Proposals include the construction of 35 major reservoirs with a total capacity of 2.18 million acre-ft, which is 41 percent greater than the mean annual outflow

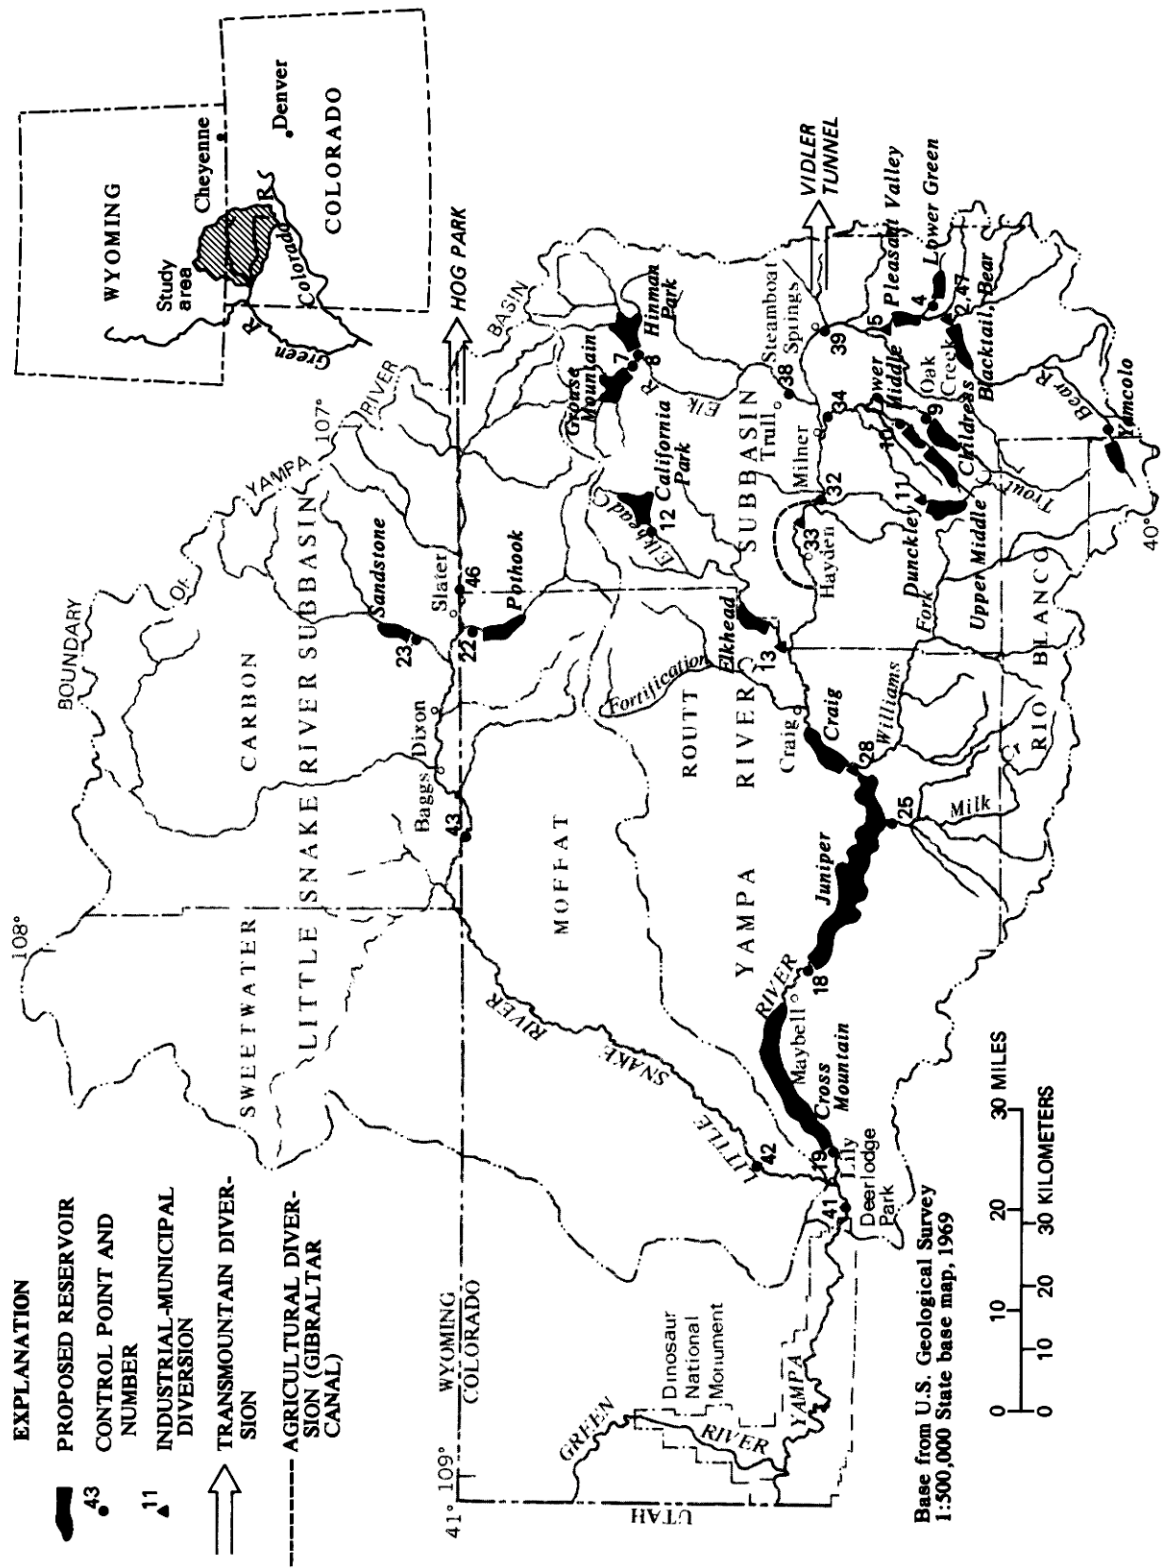


Figure 1. -- Location of some representative proposed reservoirs and control points used in multireservoir-modeling analysis.

from the basin (Steele and others, 1979). The effects of reservoir development on streamflow and the effects on fish and wildlife habitat need to be determined. Accordingly, the U.S. Fish and Wildlife Service requested that the U.S. Geological Survey determine the effects of potential reservoir configurations and various allocations for irrigation and transmountain diversions on the quantity of streamflow throughout the Yampa River basin.

In this study, a multireservoir-flow model was used to simulate the effects of various configurations of 17 proposed reservoirs, a proposed transmountain diversion, and a proposed addition to a second existing transmountain diversion, on streamflow in the Yampa River basin. The 17 proposed reservoirs are the larger of the total 35 reservoirs being considered for construction in the basin. While the geohydrologic characteristics of the Yampa River basin are well known, the physical characteristics and operating schedules of the reservoirs and transmountain diversions are speculative, as are the flows resulting from the model simulations. To obtain some knowledge of the possible effects on streamflow, five potential options including one representing historical conditions (no additional reservoir development) and four representing various degrees of reservoir and transmountain-diversion development were studied. This study is an extension of earlier reservoir modeling for the Yampa River basin (Adams and others, 1982).

By varying the percentages of agricultural and transmountain diversions within each proposed reservoir-development option studied, different degrees of development were simulated, thus providing results for a greater range of alternatives. The results of these simulations will provide water managers and planners with some insight into how proposed surface-water developments will affect minimum streamflows.

Results for nine representative control points are presented in this report. Results for the remaining 38 control points may be obtained from the U.S. Geological Survey for the cost of computer and reproduction time.

MODEL DESCRIPTION

The multireservoir-simulation model used in this study was the HEC-3 multireservoir-flow model developed by the U.S. Army, Corps of Engineers (1968) to do multipurpose, multireservoir routing of streamflow within a river basin. For this study, the Yampa River basin was simulated by 47 control points, arranged in downstream order, representing either a reservoir, a diversion or return-flow point, a confluence of streams, or a stream reach where fish and wildlife habitat is of interest. At all reservoir control points, monthly values were specified for net evaporation (evaporation minus precipitation), downstream discharge-channel capacities, and reservoir geometry (including elevation-area and elevation-volume tables). Storage in each reservoir was divided into six storage and surface-area increments to facilitate approximate simultaneous adjustment of all reservoir levels throughout the basin. Monthly diversions, return flows to the next downstream control point, and estimates of consumptive use were specified at all diversion control points. Between all control points, incremental inflow was computed on the basis of available streamflow records.

DATA AVAILABILITY

Streamflow Records

Daily streamflow records from 36 streamflow-gaging stations, unadjusted for changes in water use (figs. 2 and 3), were used to compute mean monthly and mean annual streamflow at the stations for water years 1910-76. Data for periods of no record were synthesized using a least-error, linear-regression technique (A. W. Burns, U.S. Geological Survey, written commun., 1976). Either measured streamflow data or a combination of measured and synthesized streamflow data were used to determine what is termed in this report as "historical conditions" for the model-analysis period (water years 1927-76). The resulting streamflow data were used to: (1) Determine incremental inflows to proposed reservoirs, and (2) determine incremental inflows between all other control points for the 1927-76 model-analysis period.

Precipitation Records

Monthly precipitation records for water years 1910-76 for climatological stations operated by the National Weather Service at Columbine, Craig, Hayden, Pyramid, and Steamboat Springs, Colo., and Dixon, Wyo. (fig. 2), were used in the reservoir analysis. Data for periods of no record were synthesized using a least-error, linear-regression technique (A. W. Burns, U.S. Geological Survey, written commun., 1976).

Evaporation Records

Few evaporation data are available for the Yampa River basin. For this reason, monthly evaporation rates determined for reservoirs in the vicinity of Denver, Colo. (Ficke and others, 1976), were used in the reservoir analysis. Monthly evaporation rates for a reservoir in the Yampa River basin were selected from the data in table 1, based on a comparison of geometric characteristics between one of the Denver-vicinity reservoirs and the reservoir of interest in the Yampa River basin. In many instances, the evaporation rates had to be estimated for November through March because ice cover prevented the collection of data (N. E. Spahr, U.S. Geological Survey, written commun., 1977).

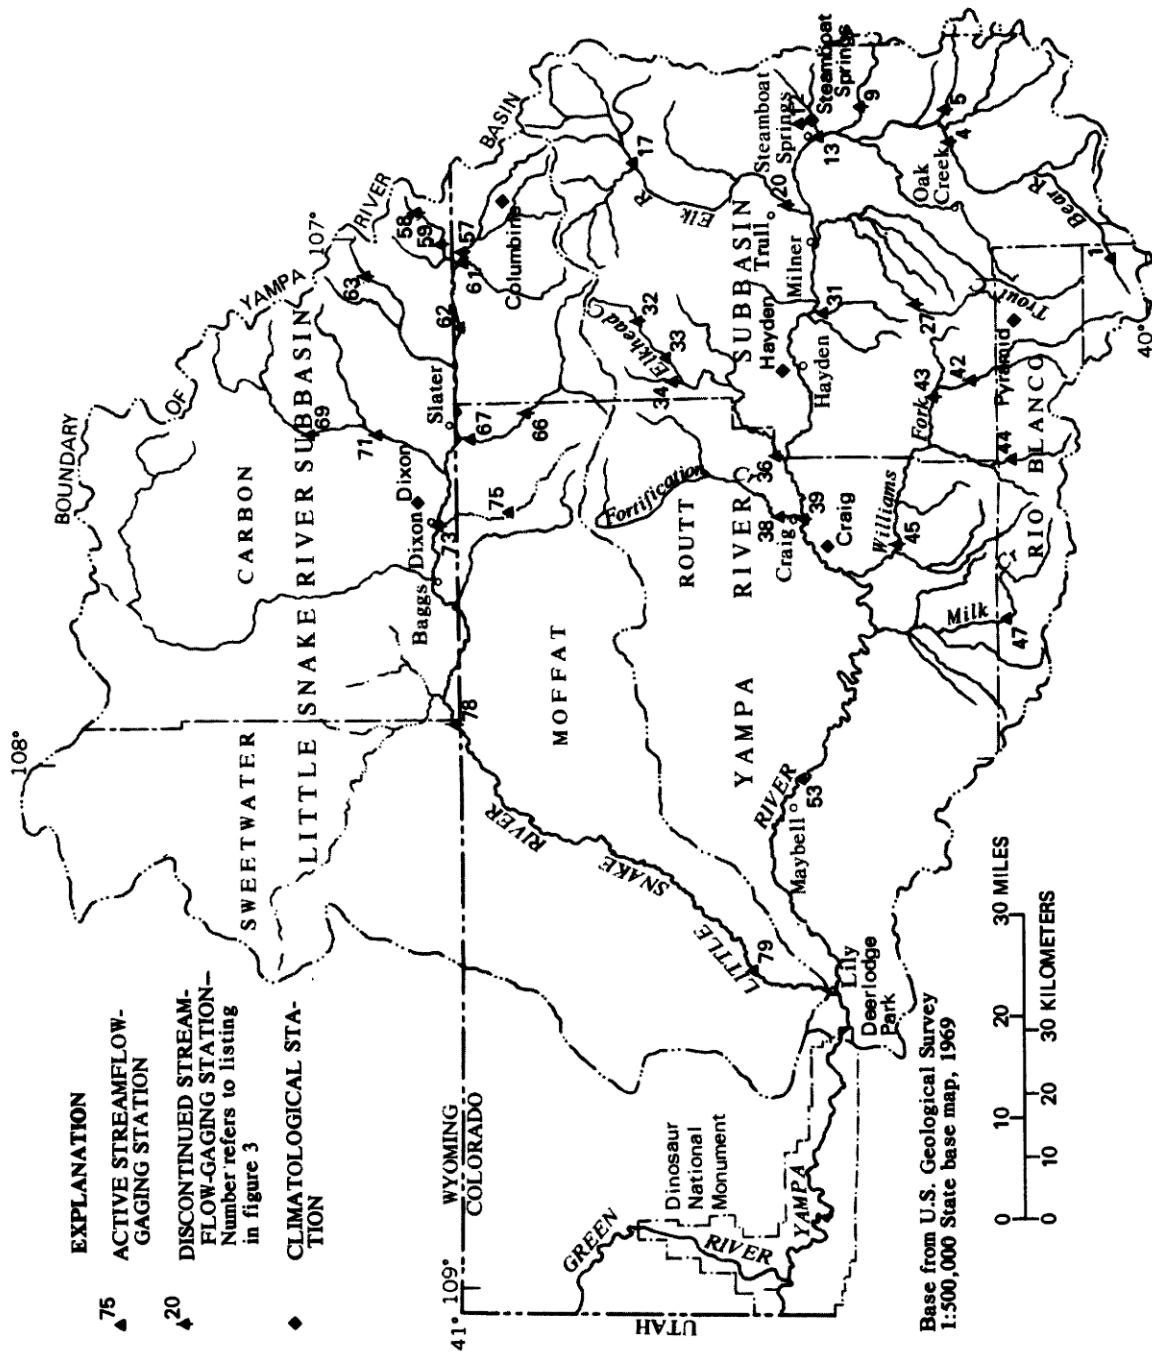


Figure 2.-- Location of streamflow-gaging and climatological stations having records used in multireservoir-modeling analysis.

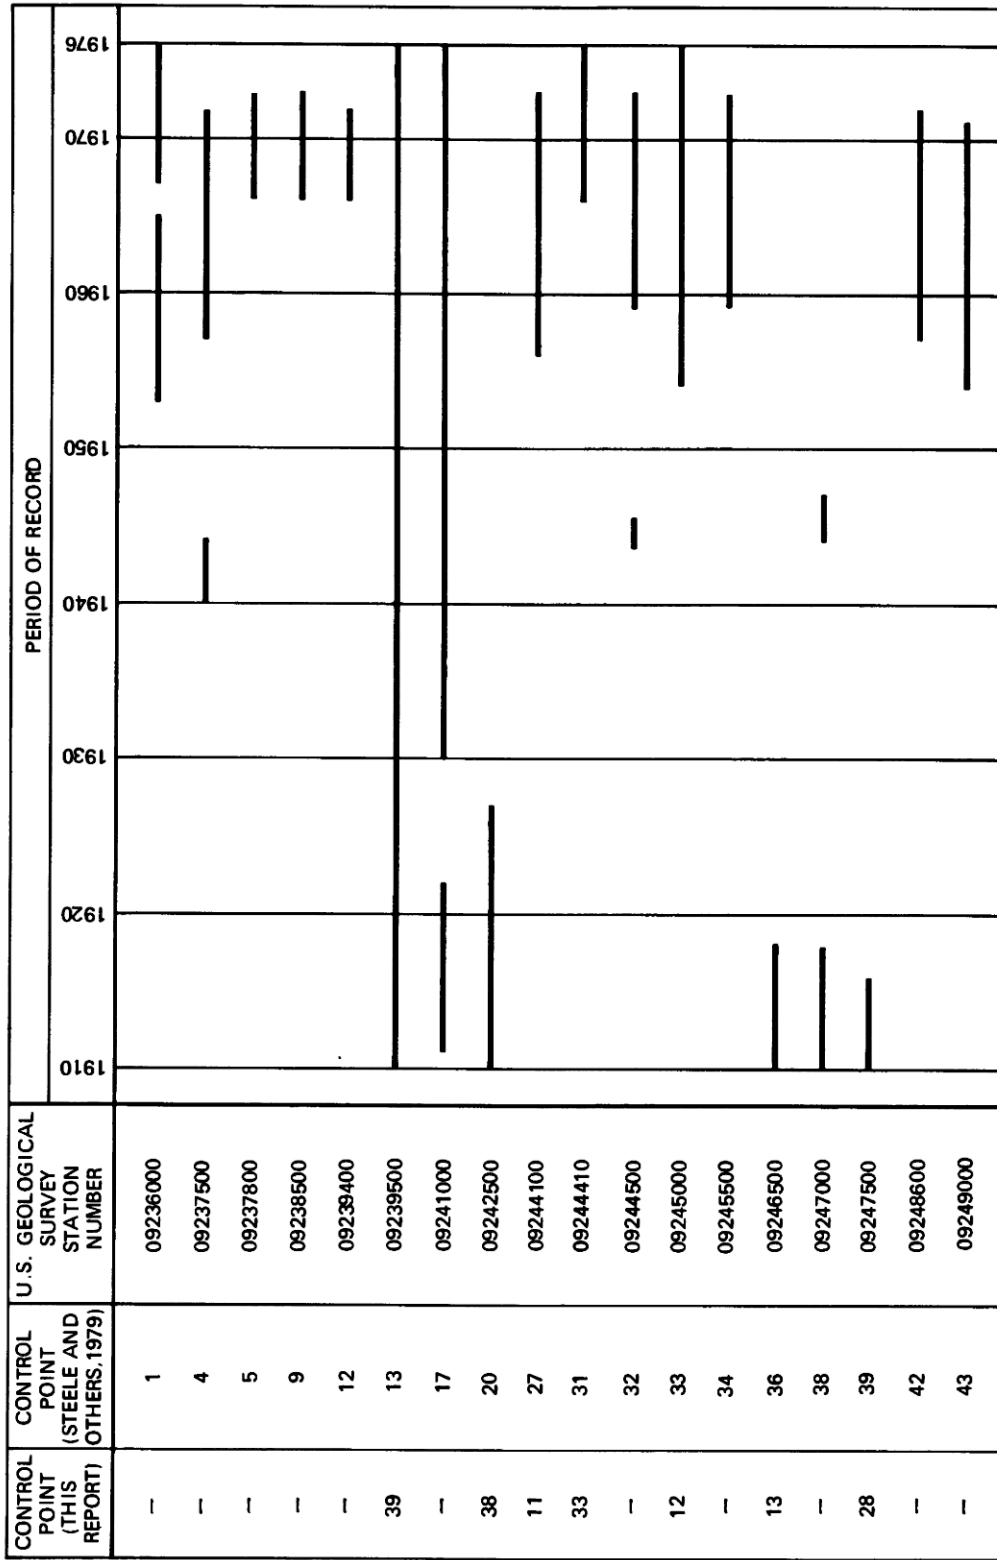


Figure 3.-- Periods of record for streamflow data used in the multireservoir-modeling analysis.

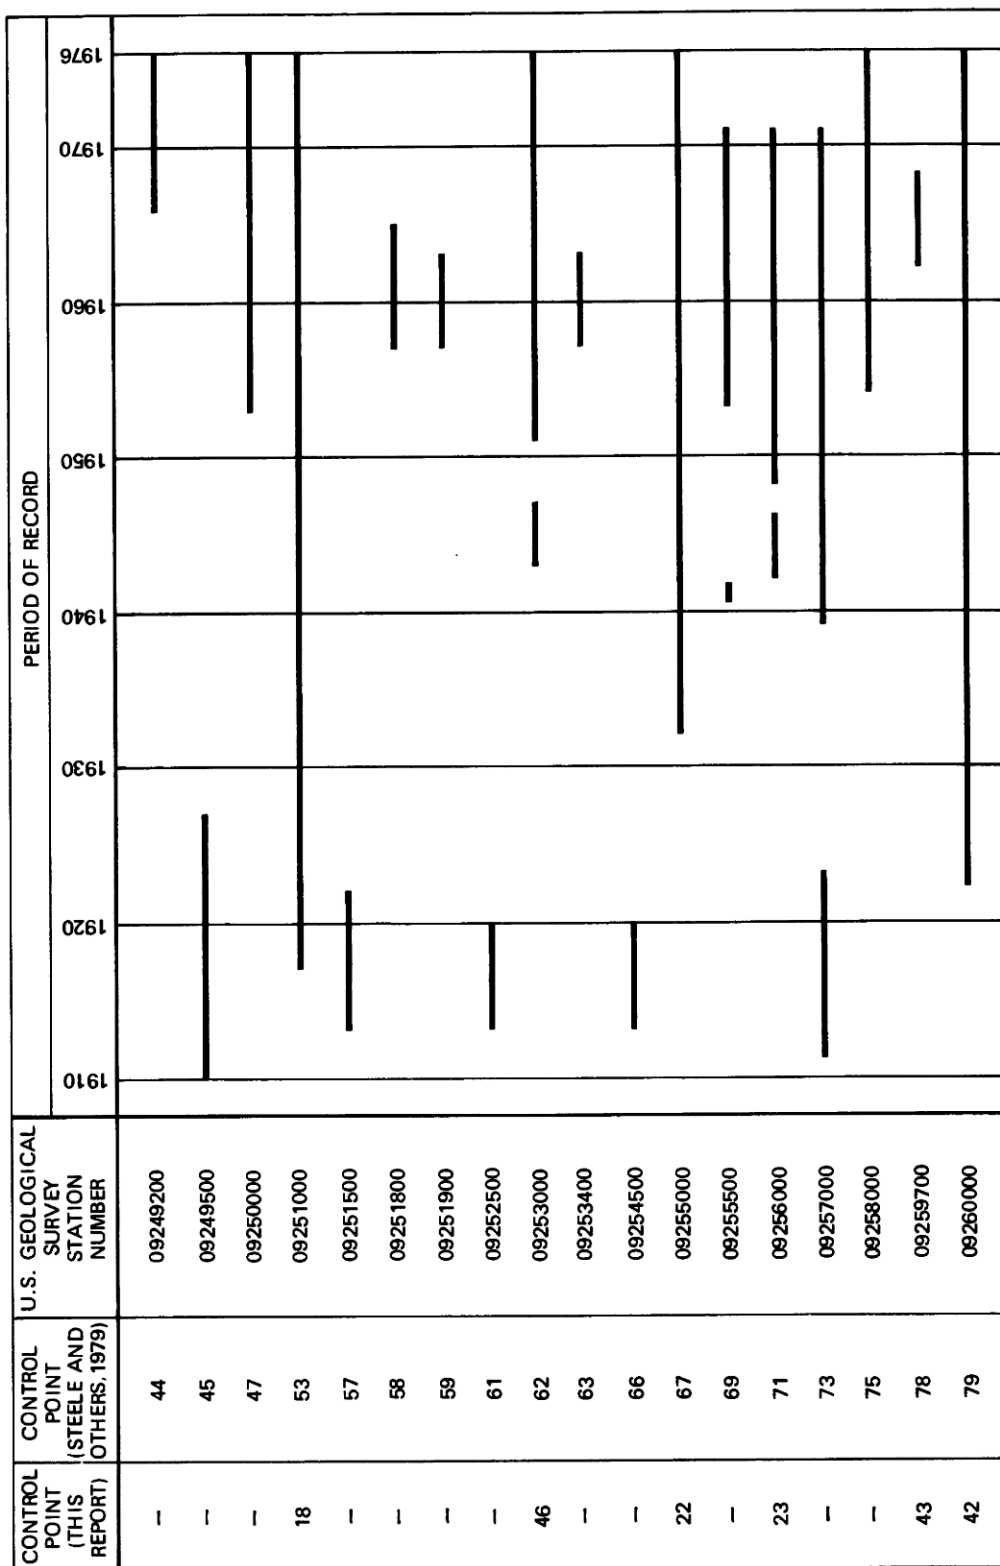


Figure 3. -- Periods of record for streamflow data used in the multireservoir-modeling analysis -- Continued.

Table 1.--*Monthly evaporation rates used for reservoirs in the Yampa River basin*

[Modified from Ficke and others (1976); values for November through March are estimated]

Reservoir near Denver, Colo.	Elevation, in feet above sea level ¹	Monthly evaporation rate, in inches											
		Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept
Antero-----	8,778	3.30	3.30	1.60	0	0	0	0	4.30	4.40	3.80	3.50	3.50
Dillon-----	9,017	4.50	3.50	1.70	0	0	0	0	3.20	4.00	5.20	5.50	5.90
Elevenmile Canyon---	8,597	4.60	4.00	2.00	0	0	0	0	4.00	5.30	5.70	5.90	6.30
Gross-----	7,282	3.70	3.30	1.60	0	0	0	4.13	4.30	4.70	4.90	5.60	3.80
Ralston-----	6,046	4.65	4.31	3.44	0	0	0	0	2.97	2.88	2.74	3.07	3.41

¹National Geodetic Vertical Datum of 1929 (NGVD of 1929).

Consumptive Use and Existing Surface-Water Diversions

Analyses of existing surface-water rights and diversions indicate that more than 90 percent of the water withdrawals and 96 percent of the consumptive use of water in northwestern Colorado during 1976 were attributed to agricultural irrigation (Knudsen and Danielson, 1977; Gray and others, 1977). Most records of diversions to hay and wheat fields and pasturelands in the basin are incomplete. However, incremental inflows between control points accounted for the effects of most of these diversions on streamflow. Diversions through the Gibraltar Canal from the Yampa River near Hayden, Colo., were documented and were included in the reservoir analysis (table 2).

Reservoir Geometry

Data regarding the geometry of the proposed reservoirs were obtained from Herbert Dishlip (U.S. Bureau of Reclamation, written commun., 1977). Reservoir data obtained included water-surface elevation versus surface area and volume and some preliminary estimates of active storage volumes (conservation pool minus dead storage) for each reservoir. Outflow elevations were generally not available, so estimates were made for dead-storage or conservation-pool elevations. The amount of active storage available for downstream needs was not specified; therefore, for the 100-percent allocation, all available reservoir storage was distributed through the water year. Thus, the 100-percent allocation for each reservoir option represented use of the reservoirs' total active storage volume for diversion purposes.

ALTERNATIVE RESERVOIR CONFIGURATIONS STUDIED

Because it was not economically feasible to model all possible configurations of the 35 proposed reservoirs, 4 representative reservoir-development options for 17 of the larger proposed reservoirs were chosen as summarized in table 3; the locations of the reservoirs and control points are shown in figure 1. These options, the same as those used in the U.S. Geological Survey's Yampa River basin assessment, include the largest proportion of the total reservoir storage proposed for the basin (Adams and others, 1982). Using these options, a representative expected range in flow may be simulated for various degrees of reservoir development.

Table 2.--Assumed monthly schedules for proposed and existing agricultural diversions

Reservoir or diversion	Control point in fig. 1	Monthly diversions, in thousands of acre-feet											
		Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sep.
<u>Reservoirs</u>													
Yamcolo-----	1	0.12	0	0	0	0	0	0.12	0.36	0.60	0.84	0.40	0.36
Bear-----	2	.30	0	0	0	0	0	.30	1.16	2.09	2.77	2.09	1.16
Pleasant Valley-----	5	.36	0	0	0	0	0	.36	1.33	2.36	3.20	2.36	1.33
Dunkley-----	11	1.30	0	0	0	0	0	1.30	5.40	9.10	12.3	9.10	5.40
California Park-----	12	1.02	0	0	0	0	0	1.02	4.22	7.36	9.80	7.36	4.22
Juniper-----	18	33.0	0	0	0	0	0	33.0	130	230	310	230	130
Cross Mountain----	19	3.70	0	0	0	0	0	3.70	15.0	26.0	35.0	26.0	15.0
Pot Hook-----	22	.78	0	0	0	0	0	.78	3.08	5.59	7.19	5.59	3.08
Sandstone-----	23	.45	0	0	0	0	0	.45	1.70	2.90	3.90	2.90	1.70
Craig-----	28	1.60	0	0	0	0	0	1.60	6.50	11.4	15.0	11.4	6.50
<u>Diversion</u>													
Gibraltar Canal-----	32	1.80	0	0	0	0	0	1.80	7.30	12.7	16.6	12.7	7.30

¹Existing diversion schedule.

Table 3.--Proposed reservoirs used in model analysis

Proposed reservoir	Stream	Proposed storage capacity (acre-feet)	Option			
			1	2	3	4
Bear ¹ -----	Yampa River	11,610	X	-	-	-
Cross Mountain ¹ ---	Yampa River	142,000	X	X	X	-
Juniper ¹ -----	Yampa River	1,079,990	X	X	X	-
Yamcolo ¹ -----	Bear River	9,000	X	X	X	X
Blacktail-----	Yampa River	229,250	-	X	X	X
Childress-----	Trout Creek	24,160	-	X	X	X
Lower Green-----	Green Creek	99,600	-	X	X	X
Lower Middle-----	Middle Creek	25,150	-	X	X	X
Upper Middle-----	Middle Creek	102,200	-	X	X	X
Pot Hook ¹ -----	Slater Fork	60,000	-	X	X	X
Sandstone ¹ -----	Savery Creek	15,500	-	X	X	X
California Park ¹ --	Elkhead Creek	36,540	-	-	X	X
Craig ¹ -----	Yampa River	44,490	-	-	X	X
Dunckley ¹ -----	Fish Creek	57,090	-	-	X	X
Grouse Mountain---	Willow Creek	79,260	-	-	X	X
Hinman Park-----	Elk River	44,040	-	-	X	X
Pleasant Valley ¹ --	Yampa River	43,220	-	-	X	X

¹Proposed diversions for agricultural use.

Some of the proposed larger reservoir complexes considered in this study include: (1) Juniper and Cross Mountain project (Colorado River Water Conservation District, 1975); (2) Oak Creek Water and Power Project (Oak Creek Power Company, 1976), which includes the following proposed reservoirs: Blacktail, Lower Green, Upper and Lower Middle, and Childress; (3) Savery-Pot Hook project (U.S. Department of the Interior, 1976); and (4) Yamcolo project (Western Engineers, Inc., 1975). The proposed Pleasant Valley Reservoir is an expansion of the existing Lake Catamount Reservoir (Woodward-Clyde Consultants, 1977).

PROPOSED DIVERSIONS USED IN THE MODEL

Diversions associated with reservoir development in the Yampa River basin are proposed for agricultural, industrial, and municipal use within the basin, and municipal use outside the basin (transmountain diversions). In the model simulations, the proposed diversions for agricultural use within the basin were varied by using percentage water-use allocations (25, 50, 75, and 100 percent) of the

total or part of active reservoir storage used in each option. Proposed diversions for industrial and municipal use within the basin were assumed to be 100-percent usage throughout the analysis; the proposed transmountain diversions also were varied by the same percentages as the proposed diversions for agricultural use.

Agricultural Diversions

Agricultural diversion for irrigation is one of the largest proposed uses of reservoir storage. An approximate monthly distribution of diversions, most occurring during the growing season, was assumed for all model simulations (table 2). The values shown in table 2 represent 100 percent of the agricultural irrigation water-use allocations from the noted reservoir. For the analysis, it was assumed that the total active reservoir storage was available each year. In the model, it also was assumed that, of the monthly agricultural diversions, two-thirds would be returned to the streams and one-third would be lost--either by plant evapotranspiration or recharge to the ground-water system. Some agricultural diversion control-point locations are shown in figure 1, but because of the numerous return-flow sites, control points for return flows are not shown in figure 1.

Industrial and Municipal Diversions

Proposed industrial and municipal diversions used in the model are listed in table 4 and the corresponding control points are shown in figure 1; the values in table 4 were not varied during the model simulations. It was assumed that industrial diversions would be completely used in the cooling processes associated with electricity generation at fossil-fueled powerplants. Values for the amount of water needed for cooling per megawatt of electricity produced were adapted from computations by Palmer and others (1977). For example, in a wet-cooling tower, 27,000 acre-ft of water is required for every 2,000 megawatts of electricity generated. For municipal uses, it was assumed that one-third of the diversions would be consumed and that two-thirds would be returned to the streams.

Transmountain Diversions

Two transmountain diversions from the Yampa River basin have been proposed: The Vidler diversion (Sheephorn project) that would divert about 132,000 acre-ft per year from the eastern part of the Yampa River subbasin to the Denver, Colo., metropolitan area (Robert Moreland, Vidler Tunnel Corp., written commun., 1977), and an addition to the existing Hog Park diversion that would divert a total of 31,000 acre-ft per year (23,000 acre-ft per year addition to the 8,000 acre-ft per year present diversion) from the eastern part of the Little Snake River subbasin to Cheyenne, Wyo. (Banner & Associates, Inc., 1976). In the model, control point 39 (Yampa River at Steamboat Springs, Colo.) represents the withdrawal point for the Vidler diversion, which will divert water from the Yampa River and six tributaries upstream from Steamboat Springs, and control point 46 (Little Snake River near Slater, Wyo.) represents the withdrawal point for the expanded Hog Park diversion (fig. 1). The monthly schedules assumed for the diversions, which were based on the availability of water during peak-flow months, are listed in table 5.

Table 4.--Proposed and existing monthly diversions for industrial and municipal use

Reservoir or diversion	Control point in fig. 1	Type of diversion	Monthly diversion (thousands of acre-feet)	Consumptive use (percent)	Remarks
Pleasant Valley Reservoir.	5	Municipal	0.91	33	Steamboat Springs, Colo., area.
Dunkley Reservoir-----	11	Municipal	.60	33	Downstream area.
Elkhead Reservoir-----	13	Industrial and municipal	.66	100	Cooling water for electric-power generation plant and municipal use in Craig, Colo., area.
Yampa River downstream from Fortification Creek.	28	Industrial	.24	100	Cooling water for electric-power generation plant in Craig, Colo., area.
Hayden powerplant-----	33	Industrial	.60	100	Cooling water for electric-power generation plant.
Blacktail Reservoir----	47	Industrial	7.85	100	Cooling water for Oak Creek Water and Power Project.

-3-

Table 5.--Assumed monthly schedules for transmountain diversions

Diversions	Control point in fig. 1	Diversions, in thousands of acre-feet												
		Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept	Annual total
Vidler ¹ ---	39	4.70	4.70	4.70	4.70	4.70	4.70	23.6	23.6	23.6	23.6	4.70	4.70	132.0
Hog Park--	46	0	0	0	0	0	0	7.75	7.75	7.75	7.75	0	0	31.0

¹Also referenced as Sheephorn project.

MODEL VERIFICATION

Because the HEC-3 simulation model has no parameters to calibrate, only verification to gaged streamflow was used to determine the accuracy of its predictive capability for the Yampa River basin. Therefore, a model simulation representing historical conditions with negligible reservoir operations was compared to streamflow records at three streamflow-gaging stations for 50 water years (1927-76). The comparisons between simulated historical and measured mean annual discharges at the three streamflow-gaging stations are shown in figures 4 through 6. Simulated historical discharges were within 5 percent of measured discharges at control point 39 (Yampa River near Steamboat Springs, Colo.) and control point 42 (Little Snake River near Lily, Colo.), and within 20 percent at control point 18 (Yampa River near Maybell, Colo.). The decrease in accuracy for certain locations is partly due to the uncertainty in accurately representing historical irrigation diversions in the model. On the basis of these simulations, it is concluded that the model has been partly verified for the study area.

MODEL SIMULATIONS

Because the HEC-3 model is limited to a 50-year interval, model simulations were made for the 50-year period of water years 1927 through 1976. This period was chosen because it included a wide range of climatic conditions, including the droughts of the 1930's and the 1950's.

Thirty-four simulations were made to determine streamflow at the 47 control points in the model. The first simulation determined historical conditions without any proposed transmountain diversions or reservoir development. For the second simulation, the assumption was made that only the two transmountain diversions would be in operation. In each simulation, mean, median, and 80-percent exceedence flows, in cubic feet per second, were determined for each month at each control point. Statistically, median flows for a given month can be expected to be exceeded once every 2 years, on the average, and the 80-percent exceedence flows can be expected to be exceeded 4 out of every 5 years, on the average.

Simulated historical monthly streamflows at the 47 control points throughout the Yampa River basin were determined as follows:

A. Historical conditions:

1. Historical conditions without any proposed diversions.
2. Historical conditions with 100 percent of proposed transmountain diversions.

B. Reservoir-development options 1 through 4:

1. Allocation of 25 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.
2. Allocation of 25 percent of total active reservoir storage for agricultural use with 25 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.

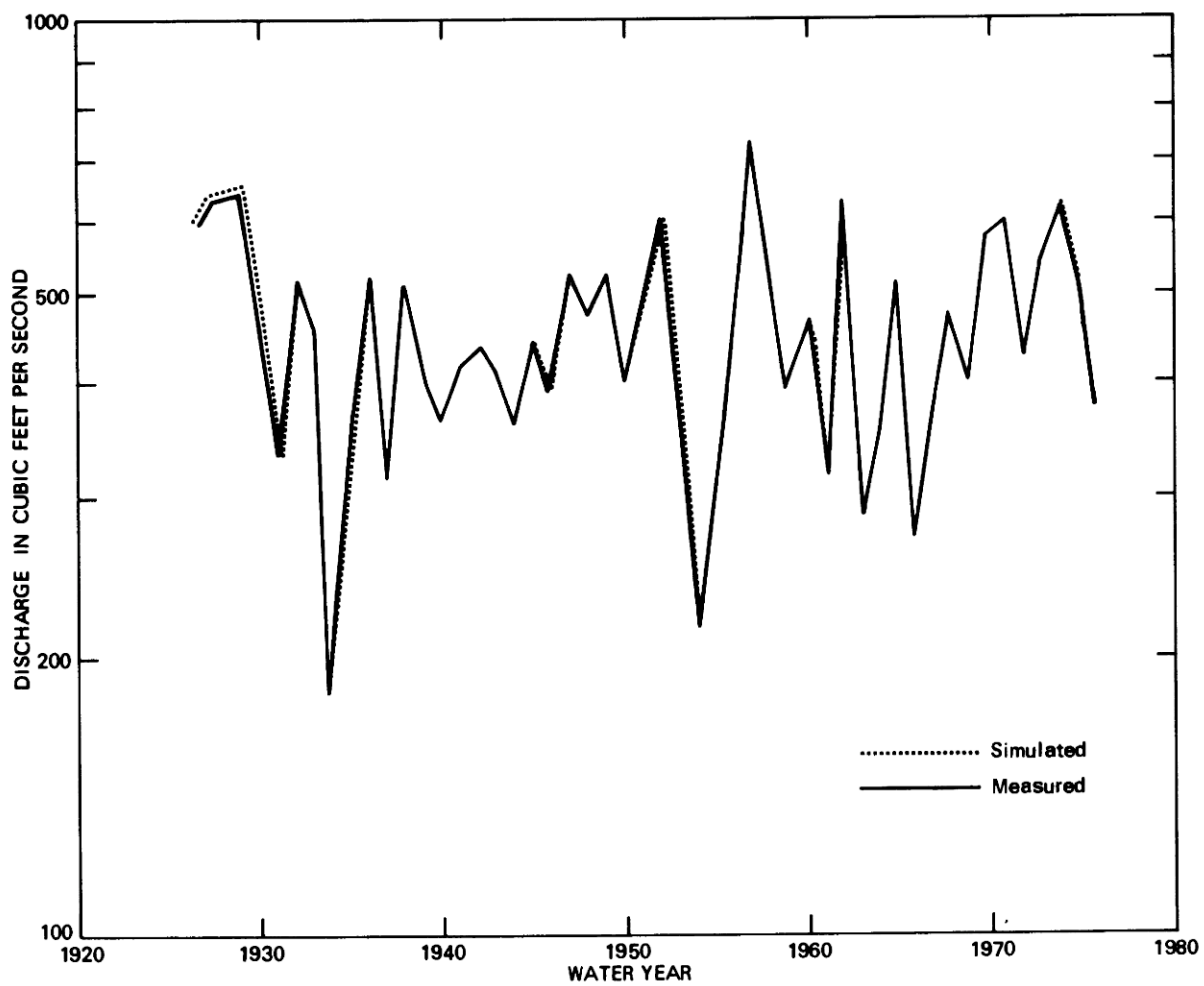


Figure 4.-- Simulated and measured mean annual streamflow at control point 39, Yampa River at Steamboat Springs, Colo., 1927-76 water years.

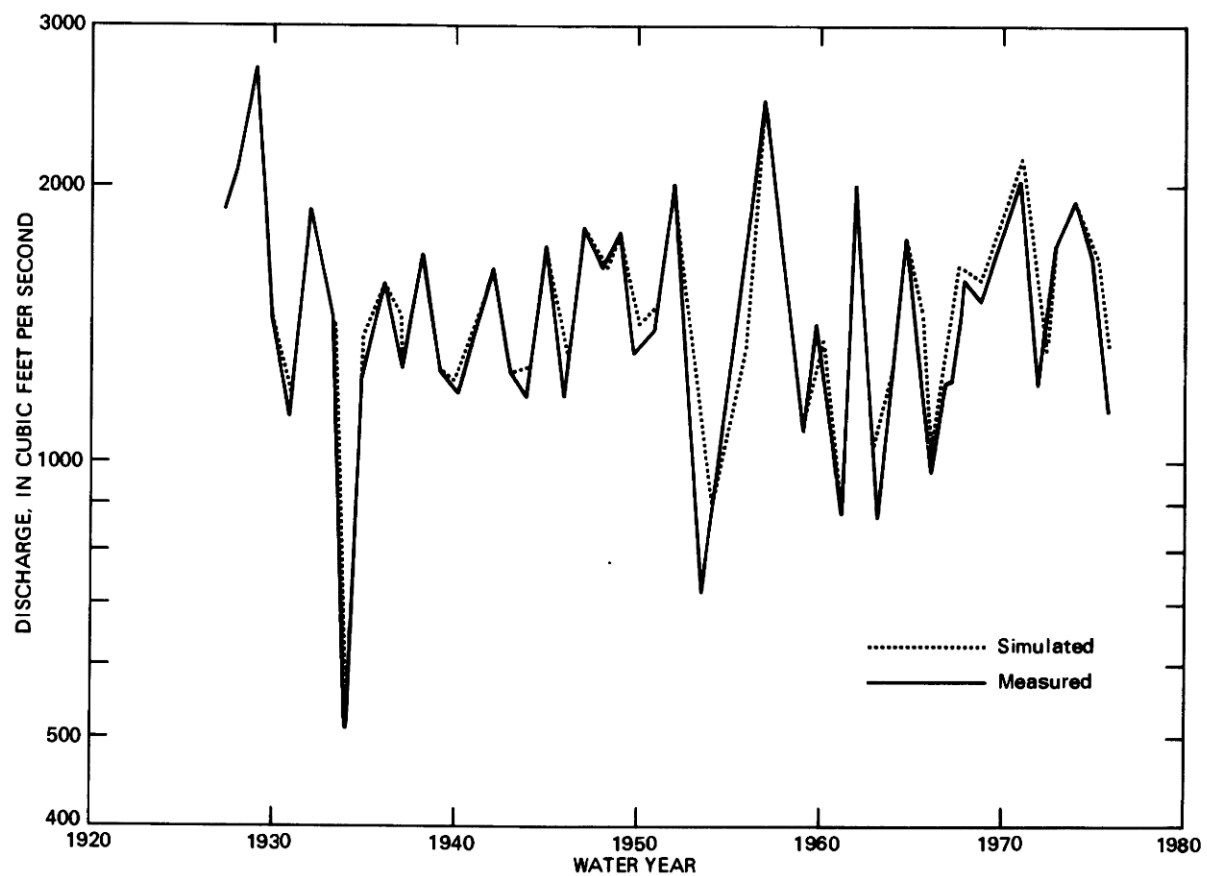


Figure 5.-- Simulated and measured mean annual streamflow at control point 18, Yampa River near Maybell, Colo., 1927-76 water years.

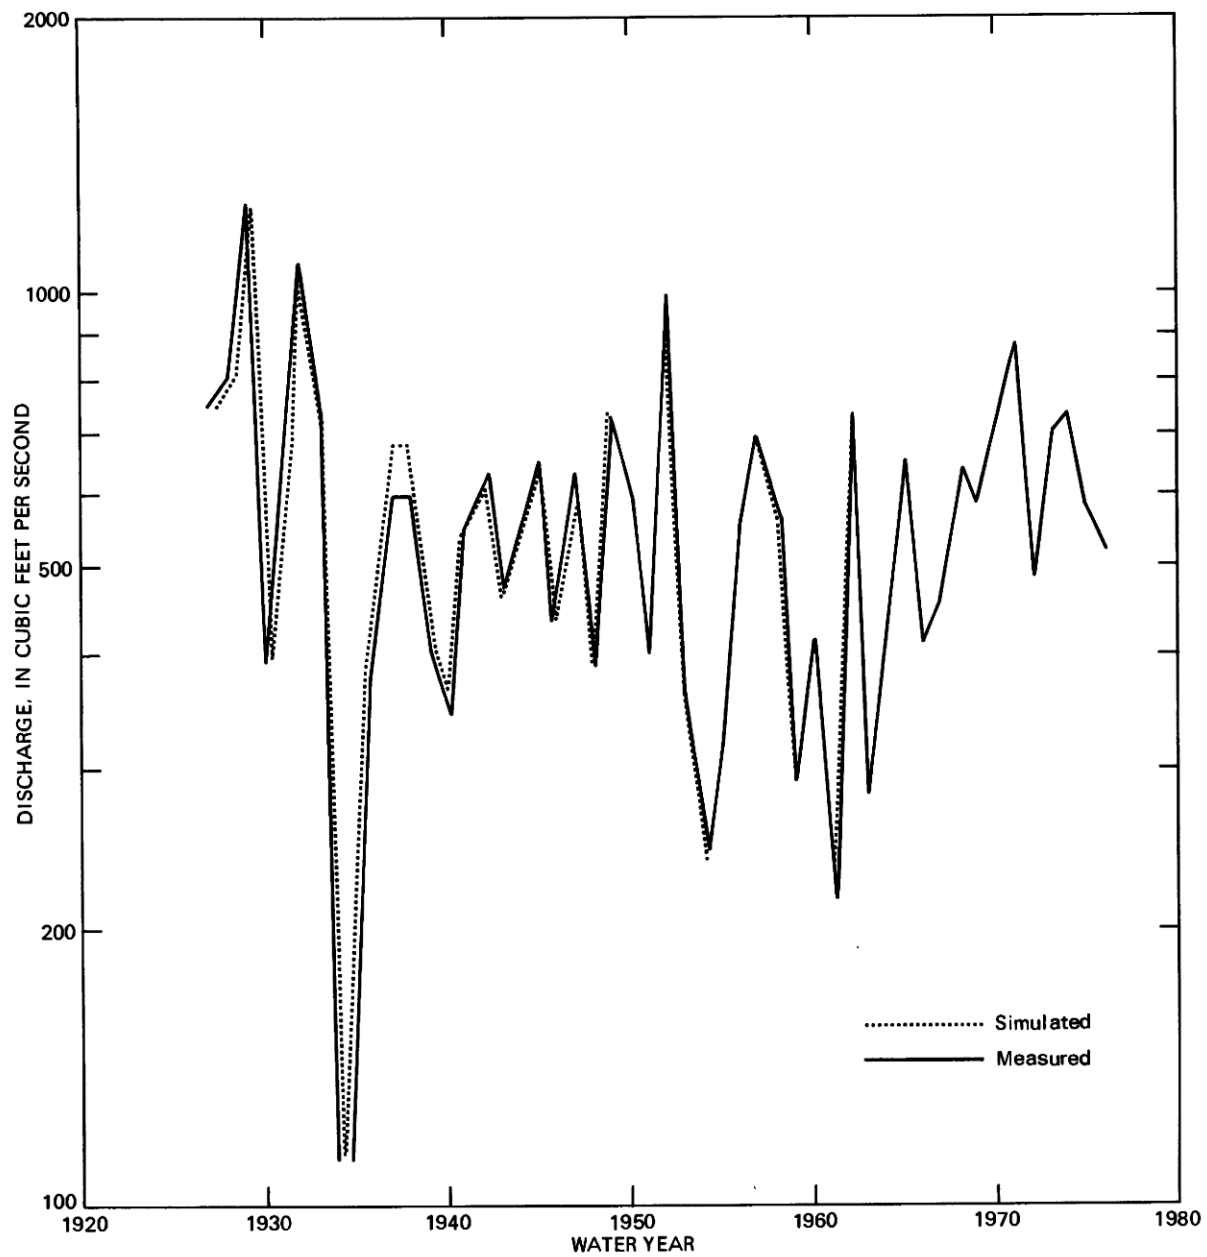


Figure 6.-- Simulated and measured mean annual streamflow at control point 42, Little Snake River near Lily, Colo., 1927-76 water years.

3. Allocation of 50 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.

4. Allocation of 50 percent of total active reservoir storage for agricultural use with 50 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.

5. Allocation of 75 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.

6. Allocation of 75 percent of total active reservoir storage for agricultural use with 75 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.

7. Allocation of 100 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.

8. Allocation of 100 percent of total active reservoir storage for agricultural use with 100 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.

MODEL RESULTS

Results of the model simulations for nine representative control points are presented in this section (table 6). Four of the controls points are at or near streamflow-gaging stations, which permits a comparison with actual conditions in the basin. The model results showing monthly values of mean, median, and 80-percent exceedence flows are presented in five tables for each control point. The first table presents the results of historical conditions with and without transmountain diversions and, where applicable, a summary of the streamflow records for water years 1927-76 from the streamflow-gaging station at or near the control point. The remaining four tables present the results of the 25-, 50-, 75-, and 100-percent water-use allocations of the agricultural diversions with and without the transmountain diversions. For all tables, monthly streamflow statistics less than the corresponding values for simulated historical conditions are underscored to indicate reductions in flow.

Table 6.--Control points for which results of model simulations are presented

Control point	Location	Significance
39	Yampa River at Steamboat Springs, Colo. (at gaging station 09239500).	Streamflow-gaging-station control; transmountain diversion.
38	Elk River near Trull, Colo. (at gaging station 09242500).	Streamflow-gaging-station control; fish habitat.
34	Trout Creek at mouth-----	Fish habitat.
28	Yampa River at Craig, Colo. (downstream from proposed Craig Reservoir).	Industrial and municipal supplies; fish habitat.
25	Confluence of Yampa River and Milk Creek.	Fish habitat.
18	Yampa River near Maybell, Colo. (at gaging station 09251000; downstream from proposed Juniper Reservoir).	Streamflow-gaging-station control; fish habitat.
19	Yampa River near Lily, Colo. (downstream from proposed Cross Mountain Reservoir).	Fish habitat.
43	Little Snake River near Baggs, Wyo. (near gaging station 09259700).	Streamflow-gaging-station control; transmountain diversion.
41	Yampa River near Deerlodge Park, Colo.	Commitments for Upper Colorado River Basin Compact.

Model-simulated historical monthly streamflows for control point 39 (Yampa River at Steamboat Springs, Colo.) are presented in tables 7 through 11. Simulated historical monthly mean streamflows without proposed transmountain diversions vary from +1 to -8 percent and have an average absolute variation of 3 percent of the monthly streamflows calculated from streamflow-gaging-station records, which indicates that the model can reasonably predict conditions at this control point. The average absolute variation is computed by summing the individual absolute values of percentage variations for a given location and model conditions and then dividing by the number of data points.

Table 7.--Summary of monthly streamflows,
control point 39 (Yampa River at Steamboat Springs, Colo.),
for simulated historical conditions, including 100 percent
of transmountain diversions, and for historical conditions

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	130	122	104	100	101	158	669	1716	1760	348	145	101
B	120	119	102	97	98	144	615	1565	1724	276	134	88
C	83	97	87	82	83	111	419	1270	1128	197	92	69
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	<u>53</u>	<u>44</u>	<u>27</u>	<u>23</u>	<u>23</u>	<u>80</u>	<u>286</u>	<u>1325</u>	<u>1373</u>	<u>69</u>	<u>69</u>	<u>28</u>
B	<u>42</u>	<u>41</u>	<u>24</u>	<u>18</u>	<u>19</u>	<u>66</u>	<u>224</u>	<u>1174</u>	<u>1332</u>	<u>0</u>	<u>56</u>	<u>10</u>
C	<u>5</u>	<u>19</u>	<u>9</u>	<u>4</u>	<u>5</u>	<u>33</u>	<u>28</u>	<u>879</u>	<u>737</u>	<u>0</u>	<u>14</u>	<u>0</u>
<u>HISTORICAL STREAMFLOWS CALCULATED FROM GAGING-STATION RECORDS</u>												
A	136	126	104	101	104	172	681	1771	1821	345	150	106
B	132	121	100	100	100	159	630	1755	1720	260	136	90
C	87	97	87	82	85	115	428	1288	1074	163	90	66

The underscored values in tables 8 through 11 indicate a reduction in the historical flow for any development condition. Only the nonirrigation months of December or January occasionally showed no decrease in flow statistics. Generally, as the reservoir-development options and percentage of water-use allocation increased, the flow volume lessened. Reservoir-development option 4 indicated the most significant reduction in flow as a result of the absence of demand from Juniper and Cross Mountain Reservoirs downstream on the Yampa River. Without the demand from these reservoirs, the flow at this site was reduced and more water remained in the upstream reservoirs.

Table 8.--Summary of simulated historical monthly streamflows, control point 39 (Yampa River at Steamboat Springs, Colo.), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 7 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>127</u>	<u>110</u>	<u>101</u>	108	<u>99</u>	<u>154</u>	<u>658</u>	<u>1707</u>	<u>1750</u>	353	149	105
	B	<u>105</u>	<u>112</u>	<u>101</u>	102	<u>98</u>	<u>138</u>	<u>607</u>	<u>1554</u>	<u>1717</u>	282	136	100
	C	<u>94</u>	<u>72</u>	<u>79</u>	88	<u>81</u>	<u>111</u>	<u>411</u>	<u>1262</u>	<u>1121</u>	208	108	77
2	A	<u>74</u>	<u>68</u>	<u>62</u>	<u>100</u>	<u>65</u>	<u>100</u>	<u>551</u>	<u>1594</u>	<u>1663</u>	<u>265</u>	<u>79</u>	<u>55</u>
	B	<u>61</u>	<u>57</u>	<u>58</u>	<u>54</u>	<u>52</u>	<u>87</u>	<u>497</u>	<u>1486</u>	<u>1642</u>	<u>181</u>	<u>64</u>	<u>44</u>
	C	<u>39</u>	<u>47</u>	<u>42</u>	<u>39</u>	<u>43</u>	<u>60</u>	<u>307</u>	<u>1197</u>	<u>1029</u>	<u>103</u>	<u>42</u>	<u>29</u>
3	A	<u>65</u>	<u>61</u>	<u>61</u>	<u>59</u>	<u>60</u>	<u>90</u>	<u>551</u>	<u>1609</u>	<u>1655</u>	<u>257</u>	<u>66</u>	<u>50</u>
	B	<u>51</u>	<u>51</u>	<u>56</u>	<u>53</u>	<u>52</u>	<u>75</u>	<u>471</u>	<u>1407</u>	<u>1612</u>	<u>179</u>	<u>52</u>	<u>39</u>
	C	<u>35</u>	<u>37</u>	<u>40</u>	<u>39</u>	<u>38</u>	<u>54</u>	<u>288</u>	<u>1180</u>	<u>1010</u>	<u>111</u>	<u>39</u>	<u>28</u>
4	A	<u>39</u>	<u>37</u>	<u>36</u>	<u>33</u>	<u>35</u>	<u>63</u>	<u>380</u>	<u>1321</u>	<u>1614</u>	<u>201</u>	<u>31</u>	<u>21</u>
	B	<u>33</u>	<u>30</u>	<u>35</u>	<u>31</u>	<u>30</u>	<u>53</u>	<u>349</u>	<u>1282</u>	<u>1585</u>	<u>130</u>	<u>22</u>	<u>15</u>
	C	<u>16</u>	<u>18</u>	<u>17</u>	<u>17</u>	<u>18</u>	<u>34</u>	<u>215</u>	<u>804</u>	<u>938</u>	<u>38</u>	<u>13</u>	<u>8</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>111</u>	<u>84</u>	<u>77</u>	<u>91</u>	<u>76</u>	<u>131</u>	<u>560</u>	<u>1609</u>	<u>1657</u>	<u>263</u>	<u>133</u>	<u>89</u>
	B	<u>96</u>	<u>78</u>	<u>78</u>	<u>87</u>	<u>77</u>	<u>117</u>	<u>508</u>	<u>1451</u>	<u>1619</u>	<u>185</u>	<u>117</u>	<u>92</u>
	C	<u>81</u>	<u>40</u>	<u>52</u>	<u>68</u>	<u>54</u>	<u>90</u>	<u>310</u>	<u>1164</u>	<u>1024</u>	<u>114</u>	<u>92</u>	<u>58</u>
2	A	<u>54</u>	<u>48</u>	<u>42</u>	<u>80</u>	<u>45</u>	<u>80</u>	<u>453</u>	<u>1496</u>	<u>1565</u>	<u>175</u>	<u>59</u>	<u>36</u>
	B	<u>42</u>	<u>38</u>	<u>38</u>	<u>34</u>	<u>33</u>	<u>68</u>	<u>399</u>	<u>1388</u>	<u>1544</u>	<u>83</u>	<u>44</u>	<u>25</u>
	C	<u>20</u>	<u>27</u>	<u>23</u>	<u>20</u>	<u>24</u>	<u>41</u>	<u>210</u>	<u>1099</u>	<u>931</u>	<u>5</u>	<u>22</u>	<u>9</u>
3	A	<u>45</u>	<u>40</u>	<u>40</u>	<u>40</u>	<u>40</u>	<u>69</u>	<u>450</u>	<u>1510</u>	<u>1557</u>	<u>167</u>	<u>46</u>	<u>33</u>
	B	<u>31</u>	<u>30</u>	<u>33</u>	<u>33</u>	<u>32</u>	<u>55</u>	<u>352</u>	<u>1365</u>	<u>1514</u>	<u>83</u>	<u>32</u>	<u>23</u>
	C	<u>16</u>	<u>16</u>	<u>19</u>	<u>19</u>	<u>19</u>	<u>34</u>	<u>180</u>	<u>1082</u>	<u>913</u>	<u>26</u>	<u>19</u>	<u>14</u>
4	A	<u>20</u>	<u>18</u>	<u>16</u>	<u>14</u>	<u>15</u>	<u>44</u>	<u>282</u>	<u>1223</u>	<u>1517</u>	<u>103</u>	<u>12</u>	<u>2</u>
	B	<u>13</u>	<u>11</u>	<u>16</u>	<u>11</u>	<u>11</u>	<u>34</u>	<u>251</u>	<u>1184</u>	<u>1487</u>	<u>32</u>	<u>3</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>15</u>	<u>117</u>	<u>706</u>	<u>885</u>	<u>0</u>	<u>0</u>	<u>0</u>

Table 9.--Summary of simulated historical monthly streamflows, control point 39 (Yampa River at Steamboat Springs, Colo.), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 7 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>123</u>	<u>107</u>	106	110	101	<u>154</u>	<u>656</u>	<u>1693</u>	<u>1742</u>	357	158	108
	B	<u>108</u>	<u>102</u>	105	106	99	<u>138</u>	<u>602</u>	<u>1542</u>	<u>1713</u>	285	144	104
	C	<u>92</u>	<u>73</u>	<u>85</u>	89	<u>82</u>	<u>108</u>	<u>382</u>	<u>1260</u>	<u>1110</u>	210	114	77
2	A	<u>74</u>	<u>68</u>	<u>62</u>	100	<u>64</u>	<u>100</u>	<u>551</u>	<u>1595</u>	<u>1664</u>	266	<u>79</u>	<u>56</u>
	B	<u>62</u>	<u>57</u>	<u>58</u>	<u>54</u>	<u>52</u>	<u>87</u>	<u>497</u>	<u>1486</u>	<u>1643</u>	<u>182</u>	<u>65</u>	<u>45</u>
	C	<u>40</u>	<u>47</u>	<u>42</u>	<u>39</u>	<u>43</u>	<u>60</u>	<u>308</u>	<u>1198</u>	<u>1030</u>	<u>106</u>	<u>43</u>	<u>30</u>
3	A	<u>61</u>	<u>53</u>	<u>56</u>	<u>57</u>	<u>58</u>	<u>86</u>	<u>526</u>	<u>1580</u>	<u>1637</u>	254	<u>77</u>	<u>55</u>
	B	<u>50</u>	<u>43</u>	<u>52</u>	<u>51</u>	<u>52</u>	<u>73</u>	<u>441</u>	<u>1439</u>	<u>1596</u>	<u>175</u>	<u>64</u>	<u>42</u>
	C	<u>32</u>	<u>33</u>	<u>36</u>	<u>36</u>	<u>38</u>	<u>50</u>	<u>260</u>	<u>1146</u>	<u>987</u>	<u>109</u>	<u>53</u>	<u>33</u>
4	A	<u>39</u>	<u>37</u>	<u>36</u>	<u>33</u>	<u>35</u>	<u>63</u>	<u>375</u>	<u>1270</u>	<u>1597</u>	191	28	21
	B	<u>33</u>	<u>30</u>	<u>35</u>	<u>31</u>	<u>30</u>	<u>53</u>	<u>349</u>	<u>1206</u>	<u>1570</u>	<u>120</u>	<u>22</u>	<u>15</u>
	C	<u>16</u>	<u>18</u>	<u>17</u>	<u>17</u>	<u>18</u>	<u>34</u>	<u>215</u>	<u>756</u>	<u>968</u>	<u>35</u>	<u>13</u>	<u>7</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>93</u>	<u>56</u>	<u>55</u>	<u>73</u>	<u>59</u>	<u>108</u>	<u>449</u>	<u>1498</u>	<u>1545</u>	184	<u>122</u>	<u>73</u>
	B	<u>90</u>	<u>46</u>	<u>59</u>	<u>75</u>	<u>58</u>	<u>95</u>	<u>393</u>	<u>1348</u>	<u>1510</u>	<u>98</u>	<u>116</u>	<u>75</u>
	C	<u>74</u>	<u>14</u>	<u>18</u>	<u>45</u>	<u>33</u>	<u>68</u>	<u>197</u>	<u>1069</u>	<u>919</u>	<u>59</u>	<u>87</u>	<u>34</u>
2	A	<u>36</u>	<u>29</u>	<u>23</u>	<u>21</u>	<u>64</u>	<u>64</u>	<u>357</u>	<u>1399</u>	<u>1469</u>	112	42	21
	B	<u>23</u>	<u>18</u>	<u>19</u>	<u>14</u>	<u>13</u>	<u>48</u>	<u>301</u>	<u>1291</u>	<u>1447</u>	<u>0</u>	<u>26</u>	<u>6</u>
	C	<u>1</u>	<u>8</u>	<u>3</u>	<u>0</u>	<u>4</u>	<u>21</u>	<u>112</u>	<u>1002</u>	<u>835</u>	<u>0</u>	<u>4</u>	<u>0</u>
3	A	<u>25</u>	<u>17</u>	<u>16</u>	<u>19</u>	<u>18</u>	<u>38</u>	<u>314</u>	<u>1369</u>	<u>1436</u>	104	<u>33</u>	<u>21</u>
	B	<u>10</u>	<u>6</u>	<u>8</u>	<u>11</u>	<u>10</u>	<u>25</u>	<u>184</u>	<u>1217</u>	<u>1396</u>	<u>23</u>	<u>21</u>	<u>8</u>
	C	<u>1</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>2</u>	<u>9</u>	<u>46</u>	<u>913</u>	<u>794</u>	<u>0</u>	<u>0</u>	<u>0</u>
4	A	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>24</u>	<u>180</u>	<u>1074</u>	<u>1401</u>	<u>0</u>	<u>0</u>	<u>0</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>14</u>	<u>153</u>	<u>1011</u>	<u>1375</u>	<u>0</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>20</u>	<u>560</u>	<u>773</u>	<u>0</u>	<u>0</u>	<u>0</u>

Table 10.--Summary of simulated historical monthly streamflows, control point 39 (Yampa River at Steamboat Springs, Colo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 7 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>109</u>	<u>96</u>	<u>95</u>	112	114	<u>147</u>	666	<u>1684</u>	<u>1735</u>	367	163	103
	B	<u>106</u>	<u>91</u>	<u>100</u>	106	100	<u>135</u>	<u>601</u>	<u>1549</u>	<u>1708</u>	293	156	104
	C	<u>63</u>	<u>53</u>	<u>56</u>	85	66	<u>103</u>	422	<u>1257</u>	<u>1125</u>	226	119	61
2	A	<u>66</u>	<u>62</u>	<u>57</u>	<u>95</u>	<u>58</u>	<u>93</u>	<u>530</u>	<u>1577</u>	<u>1668</u>	<u>270</u>	<u>82</u>	<u>55</u>
	B	<u>57</u>	<u>57</u>	<u>52</u>	<u>47</u>	<u>49</u>	<u>85</u>	<u>495</u>	<u>1465</u>	<u>1643</u>	<u>184</u>	<u>67</u>	<u>45</u>
	C	<u>34</u>	<u>32</u>	<u>38</u>	<u>32</u>	<u>29</u>	<u>50</u>	<u>292</u>	<u>1146</u>	<u>1032</u>	<u>108</u>	<u>45</u>	<u>31</u>
3	A	<u>55</u>	<u>45</u>	<u>43</u>	<u>46</u>	<u>44</u>	<u>147</u>	<u>456</u>	<u>1493</u>	<u>1634</u>	<u>276</u>	<u>88</u>	<u>50</u>
	B	<u>44</u>	<u>34</u>	<u>42</u>	<u>45</u>	<u>43</u>	<u>64</u>	<u>387</u>	<u>1373</u>	<u>1592</u>	<u>208</u>	<u>77</u>	<u>42</u>
	C	<u>27</u>	<u>25</u>	<u>27</u>	<u>26</u>	<u>28</u>	<u>44</u>	<u>231</u>	<u>1065</u>	<u>1013</u>	<u>122</u>	<u>61</u>	<u>27</u>
4	A	<u>39</u>	<u>37</u>	<u>36</u>	<u>33</u>	<u>35</u>	<u>63</u>	<u>371</u>	<u>1221</u>	<u>1581</u>	<u>184</u>	<u>27</u>	<u>21</u>
	B	<u>33</u>	<u>30</u>	<u>35</u>	<u>31</u>	<u>30</u>	<u>53</u>	<u>349</u>	<u>1145</u>	<u>1552</u>	<u>109</u>	<u>22</u>	<u>15</u>
	C	<u>16</u>	<u>18</u>	<u>17</u>	<u>17</u>	<u>18</u>	<u>34</u>	<u>215</u>	<u>712</u>	<u>954</u>	<u>35</u>	<u>13</u>	<u>7</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>46</u>	<u>29</u>	<u>24</u>	<u>34</u>	<u>48</u>	<u>107</u>	<u>406</u>	<u>1394</u>	<u>1445</u>	<u>120</u>	<u>94</u>	<u>39</u>
	B	<u>39</u>	<u>10</u>	<u>11</u>	<u>28</u>	<u>32</u>	<u>82</u>	<u>381</u>	<u>1257</u>	<u>1404</u>	<u>32</u>	<u>93</u>	<u>28</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>36</u>	<u>172</u>	<u>963</u>	<u>828</u>	<u>0</u>	<u>21</u>	<u>0</u>
2	A	<u>16</u>	<u>13</u>	<u>9</u>	<u>8</u>	<u>51</u>	<u>37</u>	<u>236</u>	<u>1270</u>	<u>1380</u>	<u>74</u>	<u>28</u>	<u>6</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>15</u>	<u>118</u>	<u>1145</u>	<u>1354</u>	<u>0</u>	<u>8</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>847</u>	<u>752</u>	<u>0</u>	<u>0</u>	<u>0</u>
3	A	<u>16</u>	<u>11</u>	<u>6</u>	<u>7</u>	<u>8</u>	<u>19</u>	<u>199</u>	<u>1163</u>	<u>1349</u>	<u>82</u>	<u>32</u>	<u>15</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>2</u>	<u>64</u>	<u>1038</u>	<u>1309</u>	<u>0</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>722</u>	<u>719</u>	<u>0</u>	<u>0</u>	<u>0</u>
4	A	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>5</u>	<u>78</u>	<u>928</u>	<u>1288</u>	<u>0</u>	<u>0</u>	<u>0</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>55</u>	<u>852</u>	<u>1259</u>	<u>0</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>419</u>	<u>661</u>	<u>0</u>	<u>0</u>	<u>0</u>

Table 11.--Summary of simulated historical monthly streamflows, control point 39 (Yampa River at Steamboat Springs, Colo.), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 7 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	90	90	84	121	136	146	682	1689	1739	370	145	88
	B	83	69	70	108	98	137	639	1552	1707	306	148	66
	C	45	48	46	49	49	67	423	1265	1133	225	73	45
2	A	54	49	47	83	48	78	469	1542	1670	277	80	46
	B	42	40	41	37	41	67	399	1414	1643	193	69	28
	C	18	20	22	20	24	35	236	1131	1034	110	30	7
3	A	52	46	38	37	37	107	414	1442	1670	294	86	45
	B	39	33	37	35	34	59	371	1371	1614	212	74	22
	C	18	19	20	20	21	34	218	1033	1105	133	20	9
4	A	39	37	36	33	35	63	370	1175	1565	178	25	21
	B	33	30	35	31	30	53	349	1083	1530	109	22	15
	C	16	18	17	17	18	34	215	654	940	35	13	7
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	7	0	2	23	34	85	349	1304	1356	76	59	5
	B	0	0	0	0	7	62	252	1182	1312	0	21	0
	C	0	0	0	0	0	9	124	879	740	0	0	0
2	A	2	2	3	1	35	22	133	1142	1283	48	18	2
	B	0	0	0	0	0	0	0	1043	1252	0	0	0
	C	0	0	0	0	0	0	0	679	643	0	0	0
3	A	9	6	3	0	0	10	65	1053	1307	76	37	17
	B	0	0	0	0	0	0	0	949	1275	0	0	0
	C	0	0	0	0	0	0	0	618	708	0	0	0
4	A	0	0	0	0	0	0	0	784	1174	0	0	0
	B	0	0	0	0	0	0	0	691	1139	0	0	0
	C	0	0	0	0	0	0	0	263	549	0	0	0

Simulated historical streamflow at this control point also showed the potential effects of proposed withdrawals for the Vidler transmountain diversion at the 100-percent water-use allocation level cited in table 7 and the four options cited in tables 8 through 11. Reduced streamflow would occur more frequently as the water-use allocation percentages increase. Zero-flow conditions were found to occur most frequently for reservoir-development option 4 for all levels of water-use allocation. Even the simulated historical conditions with 100 percent of the transmountain diversions indicated zero flow commonly occurring only during July.

Model-simulated historical monthly streamflows for control point 38 (Elk River near Trull, Colo.) are presented in tables 12 through 16. Simulated monthly streamflows for historical conditions without proposed transmountain diversions vary from +1 to -25 percent and have an average absolute variation of 11 percent of the monthly streamflows calculated from streamflow-gaging-station records.

Table 12.--*Summary of monthly streamflows, control point 38 (Elk River near Trull, Colo.), for simulated historical conditions, including 100 percent of transmountain diversions, and for historical conditions*

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	84	76	79	76	90	146	580	1911	2082	498	85	57
B	83	79	80	75	89	143	561	1873	2129	443	82	54
C	46	47	62	56	79	118	420	1476	1646	137	55	29
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	84	76	79	76	90	146	580	1911	2082	498	85	57
B	83	79	80	75	89	143	561	1873	2129	443	82	54
C	46	47	62	56	79	118	420	1476	1646	137	55	29
<u>HISTORICAL STREAMFLOWS CALCULATED FROM GAGING-STATION RECORDS</u>												
A	109	91	85	79	89	156	633	1995	2149	552	113	74
B	110	91	86	78	86	146	580	1955	2170	482	100	74
C	57	60	69	55	76	116	434	1488	1574	206	62	37

Table 13.--Summary of simulated historical monthly streamflows,
control point 38 (Elk River near Trull, Colo.),
with 25 percent of agricultural and no transmountain diversions,
and with 25 percent of both agricultural and transmountain diversions, and
including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 12 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	98	88	88	85	94	147	546	1850	2078	510	105	75
	B	95	90	89	81	93	144	529	1800	2123	448	103	75
	C	61	62	75	65	83	121	397	1393	1646	159	77	50
2	A	110	88	87	87	93	146	547	1823	2068	513	118	87
	B	112	91	89	87	93	143	529	1742	2098	447	116	86
	C	84	59	69	64	82	120	397	1376	1646	172	99	67
3	A	173	164	163	158	165	200	490	1423	1854	555	212	172
	B	180	167	165	160	167	200	461	1326	1831	469	215	170
	C	146	147	155	148	160	183	372	1032	1498	285	182	146
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	100	88	88	85	94	146	547	1842	2075	515	108	76
	B	95	90	89	81	93	144	529	1781	2105	451	105	76
	C	69	62	75	65	83	121	397	1394	1646	178	79	51
2	A	112	86	85	86	91	145	547	1814	2064	521	124	90
	B	119	90	89	87	91	143	529	1740	2092	450	126	93
	C	90	58	69	56	79	120	397	1376	1646	202	109	59
3	A	248	230	227	221	229	308	491	1419	1852	561	214	171
	B	237	217	224	214	221	292	461	1320	1828	478	218	170
	C	183	188	195	193	206	249	372	1032	1498	292	182	144
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24

Table 14.--Summary of simulated historical monthly streamflows, control point 38 (Elk River near Trull, Colo.), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 12 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	98	88	88	85	94	147	547	1838	2074	517	113	77
	B	95	90	89	82	93	143	529	1777	2110	457	109	76
	C	68	62	74	65	83	121	397	1398	1646	164	83	51
2	A	106	86	86	85	92	146	547	1818	2066	520	127	87
	B	115	90	89	87	92	143	529	1748	2092	458	126	89
	C	83	58	69	57	79	120	397	1377	1646	181	108	66
3	A	171	163	163	157	163	198	491	1396	1819	587	249	174
	B	175	166	165	160	167	199	461	1308	1842	525	255	169
	C	147	147	155	148	160	180	372	1034	1472	310	205	142
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	99	85	86	80	95	145	547	1832	2068	535	115	81
	B	100	90	89	81	93	143	529	1765	2108	461	111	81
	C	71	58	69	59	82	120	397	1384	1646	232	93	50
2	A	106	84	83	80	93	145	547	1808	2062	537	139	85
	B	112	91	82	80	90	143	529	1750	2095	469	146	85
	C	57	50	67	55	79	116	397	1376	1646	231	119	51
3	A	175	162	161	154	160	194	493	1390	1813	603	248	176
	B	181	166	166	159	167	199	461	1308	1834	557	260	170
	C	150	147	155	145	156	170	372	1038	1472	317	196	142
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24

Table 15.--Summary of simulated historical monthly streamflows, control point 38 (Elk River near Trull, Colo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 12 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	93	82	82	81	90	143	552	1853	2073	532	115	75
	B	94	86	84	80	91	138	538	1843	2121	473	118	80
	C	53	55	64	58	77	117	397	1402	1656	184	84	43
2	A	96	83	83	81	90	146	548	1842	2067	534	128	74
	B	108	86	83	82	90	143	530	1842	2104	476	139	79
	C	52	55	67	55	77	117	397	1396	1643	198	83	37
3	A	143	126	117	110	115	185	452	1491	1841	682	299	180
	B	175	150	149	121	102	169	451	1527	1865	648	308	182
	C	53	51	48	41	53	88	332	1066	1488	408	244	105
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	90	79	80	74	91	143	557	1865	2074	549	108	69
	B	90	81	78	72	88	137	550	1855	2119	485	109	69
	C	46	48	63	50	73	116	399	1421	1659	225	59	33
2	A	93	79	80	76	89	142	553	1853	2070	544	123	71
	B	97	81	81	74	86	140	536	1839	2118	485	123	69
	C	46	50	64	55	74	115	398	1404	1656	210	81	33
3	A	129	110	101	91	100	143	483	1548	1884	714	290	158
	B	136	105	85	73	88	135	446	1596	1914	685	319	189
	C	50	43	47	40	50	84	329	1095	1522	451	207	34
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24

Table 16.--Summary of simulated historical monthly streamflows, control point 38 (Elk River near Trull, Colo.), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 12 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	86	77	78	79	90	141	558	1878	2081	538	106	65
	B	81	79	75	74	90	139	539	1858	2125	481	109	67
	C	46	54	62	50	76	111	402	1416	1667	185	59	31
2	A	87	77	79	77	89	143	554	1873	2075	540	114	67
	B	84	76	81	74	91	140	540	1862	2120	482	113	68
	C	46	54	62	50	76	112	397	1416	1662	186	66	32
3	A	92	80	73	71	77	138	451	1650	1956	772	284	115
	B	68	58	53	52	54	96	405	1614	1973	735	337	54
	C	31	37	43	33	49	75	306	1253	1573	518	130	22
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	84	75	77	73	90	140	566	1892	2085	538	99	59
	B	81	75	75	71	81	131	559	1867	2132	480	84	56
	C	46	47	62	50	69	106	409	1459	1670	188	56	29
2	A	85	77	77	73	91	144	557	1884	2079	543	104	63
	B	89	76	75	71	85	142	553	1864	2124	491	95	66
	C	46	47	62	50	72	116	397	1424	1668	195	56	29
3	A	77	70	66	58	70	115	423	1769	2003	789	222	100
	B	64	53	51	47	53	91	385	1755	2010	793	156	49
	C	35	37	43	33	48	72	291	1403	1605	515	40	23
4	A	76	68	77	80	97	153	580	1905	2069	485	75	50
	B	73	71	79	80	97	152	561	1866	2117	430	72	48
	C	41	43	57	51	88	125	425	1464	1637	121	47	24

The effects of agricultural and transmountain diversions were reduced at this site because no proposed diversions were considered for the proposed Hinman Park or Grouse Mountain Reservoirs. In reservoir-development options 1 and 2, the 50-year flow statistics (tables 12 through 16) have responded to an increased demand from the downstream Yampa main-stem reservoirs, principally Juniper and Cross Mountain Reservoirs, by a slight reduction in the peak flow months (April to June). Reservoir-development options 3 and 4 included the proposed Hinman Park and Grouse Mountain Reservoirs upstream and tended to even out the monthly flow cycle. In reservoir-development option 3, more water had been released from Hinman Park and Grouse Mountain Reservoirs to meet the demand from the Juniper and Cross Mountain Reservoirs during the irrigation season. Reservoir-development option 4 includes the Hinman Park and Grouse Mountain Reservoirs, but the downstream demand from Juniper and Cross Mountain Reservoirs is not included; consequently the flow did not vary with increased water-use allocations. Increasing the water-use allocation percentages generally could increase the number of months that the flow statistics are less than the historical conditions (underscored statistics, tables 12 through 16), especially during the irrigation season (April to October). The upstream reservoir could cause a reduction in peak-flow months and a flow increase during the low-flow, high water-use irrigation months.

The transmountain diversions have little or no effect in reservoir-development options 1, 2, and 4. Only in reservoir-development option 3, where the large downstream reservoirs were requiring water to replace the Vidler transmountain diversion water taken from the Steamboat Springs location, can any real effect on the flow statistics be noticed for the Elk River near Trull, Colo.

Model-simulated historical monthly streamflows for control point 34 (Trout Creek at mouth) are presented in tables 17 through 21; the general location of this site is shown in figure 1. The effects of agricultural and transmountain diversions would be negligible in many instances at this control point. The effects of the proposed diversions for the Oak Creek Water and Power Project are indicated by the data for reservoir-development options 2, 3, and 4. The Oak Creek power complex includes only industrial diversions; therefore, very little change in monthly flow statistics can be noticed with changes in water-use allocation (tables 18 through 21). Reservoir-development option-4 monthly streamflows were slightly reduced because the Juniper and Cross Mountain Reservoirs were not in operation and did not require upstream inflow to fulfill diversion requirements.

Table 17.--*Summary of simulated historical monthly streamflows, control point 34 (Trout Creek at mouth), for historical conditions and with 100 percent of transmountain diversions*

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS WITHOUT TRANSMOUNTAIN DIVERSIONS</u>												
A	21	25	24	23	27	41	158	297	103	22	14	14
B	17	23	23	23	29	40	128	243	88	17	11	11
C	11	17	17	17	23	29	91	166	40	11	6	11
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	21	25	24	23	27	41	158	297	103	22	14	14
B	17	23	23	23	29	40	128	243	88	17	11	11
C	11	17	17	17	23	29	91	166	40	11	6	11

Table 18.--Summary of simulated historical monthly streamflows, control point 34 (Trout Creek at mouth), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDANCE. Underscored values are less than corresponding table 17 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	24	25	23	42	27	39	131	224	94	34	23	20
	B	19	20	20	21	26	36	114	191	84	41	15	10
	C	10	15	15	15	21	26	81	140	52	15	9	9
3	A	23	24	22	21	24	36	116	194	99	44	25	19
	B	17	19	19	20	25	32	102	170	94	41	13	9
	C	8	14	14	15	20	25	75	132	65	13	8	8
4	A	16	18	19	20	23	34	121	239	99	32	16	12
	B	13	17	18	19	23	30	98	204	85	31	7	7
	C	7	13	13	14	19	24	72	137	49	11	3	5
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	24	25	23	42	27	39	131	224	94	34	23	20
	B	19	20	20	21	26	36	114	191	84	41	15	10
	C	10	15	15	15	21	26	81	140	52	15	9	9
3	A	23	24	22	21	24	36	116	194	99	44	25	19
	B	17	19	19	20	25	32	102	170	94	41	13	9
	C	8	14	14	15	20	25	75	132	65	13	8	8
4	A	16	18	19	20	23	34	121	239	99	32	16	12
	B	13	17	18	19	23	30	98	204	85	31	7	7
	C	7	13	13	14	19	24	72	137	49	11	3	5

Table 19.--Summary of simulated historical monthly streamflows, control point 34 (Trout Creek at mouth), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 17 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	24	25	23	42	27	39	131	224	94	34	23	2
	B	19	20	20	21	26	36	114	191	84	41	15	10
	C	10	15	15	15	21	26	81	140	52	15	9	9
3	A	23	23	22	21	24	36	120	203	98	34	21	18
	B	18	19	19	19	24	32	107	176	88	39	13	9
	C	8	14	14	14	19	24	75	131	55	13	8	8
4	A	15	19	20	21	24	35	126	251	98	20	9	9
	B	13	18	18	20	24	32	104	218	84	14	6	7
	C	7	13	13	15	20	26	78	145	35	6	3	5
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	24	25	23	22	47	39	131	224	94	34	23	20
	B	19	20	20	21	26	36	114	191	84	41	15	10
	C	10	15	15	15	21	26	81	140	52	15	9	9
3	A	23	23	22	21	24	36	120	202	98	34	21	19
	B	18	19	19	19	24	32	107	176	88	39	13	9
	C	8	14	14	14	19	24	75	131	55	13	8	8
4	A	15	19	20	21	24	35	126	251	98	20	9	9
	B	13	18	18	20	24	32	104	218	84	14	6	7
	C	7	13	13	15	20	26	78	145	35	6	3	5

Table 20.--Summary of simulated historical monthly streamflows, control point 34 (Trout Creek at mouth), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 17 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	23	25	23	41	28	41	130	226	94	34	24	20
	B	15	20	20	21	26	36	115	196	84	41	15	10
	C	10	15	15	15	20	26	76	140	52	15	9	7
3	A	22	23	20	19	22	41	114	211	92	35	25	21
	B	16	19	19	19	21	28	99	186	86	39	13	11
	C	8	13	10	14	14	21	71	130	53	13	8	7
4	A	15	19	20	21	24	36	129	256	92	16	9	9
	B	13	18	18	20	25	33	107	215	78	12	6	7
	C	7	13	13	15	20	26	78	140	29	6	3	5
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	22	24	22	22	46	40	133	227	95	38	26	22
	B	15	20	20	21	24	30	117	201	84	41	15	10
	C	7	15	15	15	15	22	86	143	52	15	7	7
3	A	21	23	20	18	22	33	120	214	93	37	26	20
	B	14	19	19	19	19	28	101	196	86	40	15	9
	C	6	13	10	14	14	20	71	136	54	13	6	6
4	A	15	19	20	21	24	36	129	256	92	16	9	9
	B	13	18	18	20	25	33	107	215	78	12	6	7
	C	7	13	13	15	20	26	78	140	29	6	3	5

Table 21.--Summary of simulated historical monthly streamflows, control point 34 (Trout Creek at mouth), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 17 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	128	243	88	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	20	22	21	43	30	40	132	230	95	38	32	24
	B	15	15	15	21	26	39	113	203	88	42	13	7
	C	7	11	11	11	15	22	76	143	54	15	7	7
3	A	18	20	18	18	20	35	112	220	93	47	35	21
	B	13	15	14	14	18	24	100	200	89	43	18	6
	C	6	10	10	10	14	20	61	133	54	17	6	5
4	A	16	19	20	21	25	37	131	258	88	16	9	9
	B	13	18	18	20	25	33	107	215	78	12	6	7
	C	7	13	13	15	20	26	77	140	29	6	3	5
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	21	25	24	23	27	41	158	297	103	22	14	14
	B	17	23	23	23	29	40	127	243	89	17	11	11
	C	11	17	17	17	23	29	91	166	40	11	6	11
2	A	18	21	19	21	47	46	135	234	98	40	41	23
	B	12	15	15	15	21	43	114	209	90	41	9	7
	C	7	11	11	11	15	22	86	150	56	15	5	7
3	A	16	19	17	16	20	29	106	235	99	54	38	18
	B	12	14	14	14	18	24	95	207	95	47	10	8
	C	6	10	10	10	14	18	58	146	67	19	4	6
4	A	16	19	20	21	25	37	131	258	88	16	9	9
	B	13	18	18	20	25	33	107	215	78	12	6	7
	C	7	13	13	15	20	26	77	140	29	6	3	5

Model-simulated historical monthly streamflows for control point 28 (Yampa River at Craig, Colo.) are presented in tables 22 through 26. This control point is located downstream from the proposed Craig Reservoir and also downstream from the confluence of the Williams Fork (fig. 1). The simulated results for reservoir-development option 1 represent both limited upstream reservoir development (table 3) and major downstream diversions from Juniper and Cross Mountain Reservoirs. The option-2 simulations included a larger number of upstream reservoirs (table 3) and consequently further reduced the flow at this site. Monthly streamflow simulations for reservoir-development options 3 and 4 included the immediate upstream effects of the Craig Reservoir and tended to even out the monthly flow distribution (tables 22 through 26). The monthly streamflow for reservoir-development option 4 is less than for option 3 because of the absence of the downstream demand from Juniper and Cross Mountain Reservoirs. The simulated historical 50-year mean monthly streamflows for the 100-percent water-use allocation (table 26) could be reduced to zero for at least 4 months each year under options 3 and 4.

Table 22.--*Summary of simulated historical monthly streamflows, control point 15 (Yampa River at Craig, Colo.), for historical conditions and with 100 percent of transmountain diversions*

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than simulated historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	138	266	273	211	260	531	2179	5052	4904	767	117	126
B	114	269	278	251	260	530	2193	5293	4924	477	89	129
C	72	210	244	98	245	505	1676	4036	3155	124	42	24
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	<u>59</u>	<u>161</u>	<u>187</u>	<u>132</u>	<u>182</u>	<u>453</u>	<u>1795</u>	<u>4661</u>	<u>4517</u>	<u>512</u>	<u>53</u>	<u>58</u>
B	<u>18</u>	<u>179</u>	<u>200</u>	<u>173</u>	<u>181</u>	<u>452</u>	<u>1803</u>	<u>4902</u>	<u>4533</u>	<u>203</u>	<u>0</u>	<u>1</u>
C	<u>0</u>	<u>30</u>	<u>162</u>	<u>22</u>	<u>170</u>	<u>427</u>	<u>1387</u>	<u>3645</u>	<u>2764</u>	<u>0</u>	<u>0</u>	<u>0</u>

Table 23.--Summary of simulated historical monthly streamflows, control point 15 (Yampa River at Craig, Colo.), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 22 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	144	224	239	194	216	461	2010	4231	4333	752	168	157
	B	114	218	249	211	217	460	2066	4354	4296	472	142	123
	C	101	172	214	115	201	437	1589	3344	2864	227	115	104
2	A	125	223	235	234	218	414	1915	4782	4822	778	154	156
	B	96	227	237	202	208	410	1977	4922	4857	475	142	131
	C	96	165	209	96	191	383	1440	3900	3094	152	97	96
3	A	158	271	308	254	290	453	1807	4214	4542	833	225	211
	B	128	272	309	289	291	460	1884	4315	4517	532	210	169
	C	115	216	291	151	262	422	1408	3469	2783	274	155	129
4	A	32	122	174	137	192	379	1733	4534	4732	651	35	51
	B	0	128	186	170	194	377	1815	4627	4740	343	3	13
	C	0	33	149	31	177	354	1378	3606	2996	0	0	0
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	130	199	214	176	193	437	1913	4124	4232	667	154	142
	B	108	195	223	191	196	439	1970	4225	4194	380	124	111
	C	100	139	185	108	173	414	1489	3244	2766	131	110	100
2	A	109	201	213	212	197	394	1815	4675	4720	702	145	142
	B	96	206	213	180	186	389	1869	4812	4745	380	139	121
	C	48	140	186	60	170	364	1344	3802	2964	100	96	96
3	A	144	242	287	236	268	432	1701	4110	4441	754	210	196
	B	116	241	288	270	269	439	1766	4194	4400	443	198	155
	C	105	174	262	145	240	402	1277	3378	2720	216	148	120
4	A	24	81	131	115	169	360	1635	4437	4634	577	26	38
	B	0	58	164	148	175	358	1718	4530	4642	245	0	0
	C	0	0	43	6	156	335	1281	3508	2898	0	0	0

Table 24.--Summary of simulated historical monthly streamflows,
control point 15 (Yampa River at Craig, Colo.),
with 50 percent of agricultural and no transmountain diversions,
and with 50 percent of both agricultural and transmountain diversions, and
including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 22 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	138	222	243	196	218	461	1998	4194	4303	740	166	150
	B	115	217	250	216	219	461	2064	4257	4248	461	144	124
	C	100	174	227	116	202	436	1580	3314	2828	212	118	100
2	A	117	221	234	231	217	414	1924	4759	4800	768	150	148
	B	96	225	234	199	206	408	1986	4900	4818	467	139	125
	C	63	164	206	90	190	383	1460	3875	3056	140	96	96
3	A	139	238	314	262	295	440	1703	4105	4435	827	262	202
	B	120	231	317	294	301	444	1754	4217	4321	537	260	173
	C	99	188	298	176	267	402	1292	3426	2717	279	203	132
4	A	26	95	152	139	196	383	1703	4403	4668	595	12	32
	B	0	67	183	174	198	381	1817	4498	4637	291	0	0
	C	0	0	80	33	181	358	1377	3505	2936	0	0	0
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	108	168	189	154	177	413	1799	3992	4100	585	134	122
	B	100	156	194	169	175	417	1877	4093	4045	272	120	108
	C	90	107	150	101	141	393	1402	3113	2641	100	100	100
2	A	81	179	191	126	238	377	1731	4552	4600	641	134	116
	B	84	172	190	156	166	372	1786	4692	4613	314	132	115
	C	1	121	164	7	150	342	1290	3678	2834	96	96	43
3	A	119	193	271	221	248	386	1499	3882	4215	706	222	175
	B	103	196	277	244	256	402	1427	4004	4101	416	216	155
	C	85	110	251	140	214	340	1090	3186	2539	214	150	108
4	A	12	46	73	86	111	302	1534	4208	4473	474	5	14
	B	0	0	60	117	146	328	1622	4303	4441	95	0	0
	C	0	0	0	0	0	221	1182	3309	2740	0	0	0

Table 25.--Summary of simulated historical monthly streamflows, control point 15 (Yampa River at Craig, Colo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 22 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	138	222	243	196	218	461	1998	4194	4303	740	166	150
	B	115	217	250	216	219	461	2064	4257	4248	461	144	124
	C	100	174	227	116	202	436	1580	3314	2828	212	118	100
2	A	117	221	234	231	217	414	1924	4759	4800	768	150	148
	B	96	225	234	199	206	408	1986	4900	4818	467	139	125
	C	63	164	206	90	190	383	1460	3875	3056	140	96	96
3	A	139	238	314	262	295	440	1703	4105	4435	827	262	202
	B	120	231	317	294	301	444	1754	4217	4321	537	260	173
	C	99	188	298	176	267	402	1292	3426	2717	279	203	132
4	A	26	95	152	139	196	383	1703	4403	4668	595	12	32
	B	0	67	183	174	198	381	1817	4498	4637	291	0	0
	C	0	0	80	33	181	358	1377	3505	2936	0	0	0
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	108	168	189	154	177	413	1799	3992	4100	585	134	122
	B	100	156	194	169	175	417	1877	4093	4045	272	120	108
	C	90	107	150	101	141	393	1402	3113	2641	100	100	100
2	A	81	179	191	126	238	377	1731	4552	4600	641	134	116
	B	84	172	190	156	166	372	1786	4692	4613	314	132	115
	C	1	121	164	7	150	342	1290	3678	2834	96	96	43
3	A	119	193	271	221	248	386	1499	3882	4215	706	222	175
	B	103	196	277	244	256	402	1427	4004	4101	416	216	155
	C	85	110	251	140	214	340	1090	3186	2539	214	150	108
4	A	12	46	73	86	111	302	1534	4208	4473	474	5	14
	B	0	0	60	117	146	328	1622	4303	4441	95	0	0
	C	0	0	0	0	0	221	1182	3309	2740	0	0	0

Table 26.--Summary of simulated historical monthly streamflows, control point 15 (Yampa River at Craig, Colo.), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 22 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	87	194	211	201	249	447	2038	4209	4271	732	124	104
	B	61	197	193	185	218	424	2093	4340	4232	459	113	79
	C	25	132	176	115	158	381	1680	3330	2843	203	34	19
2	A	62	181	207	204	200	395	1884	4765	4780	772	128	107
	B	14	176	200	173	189	400	2014	4963	4809	465	127	66
	C	0	119	176	39	162	334	1408	3884	3067	154	6	0
3	A	<u>56</u>	<u>65</u>	<u>76</u>	<u>89</u>	<u>94</u>	<u>304</u>	<u>1658</u>	<u>4464</u>	<u>4516</u>	997	272	133
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>189</u>	<u>1690</u>	<u>4624</u>	<u>4521</u>	753	304	0
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>16</u>	<u>1180</u>	<u>3624</u>	<u>3145</u>	438	<u>33</u>	<u>0</u>
4	A	<u>11</u>	<u>36</u>	<u>83</u>	<u>116</u>	<u>151</u>	<u>370</u>	<u>1724</u>	<u>4276</u>	<u>4548</u>	<u>483</u>	0	0
	B	<u>0</u>	<u>0</u>	<u>25</u>	<u>166</u>	<u>195</u>	<u>375</u>	<u>1813</u>	<u>4374</u>	<u>4519</u>	<u>113</u>	0	0
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>335</u>	<u>1370</u>	<u>3329</u>	<u>2828</u>	<u>0</u>	<u>0</u>	<u>0</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>24</u>	<u>74</u>	<u>111</u>	<u>101</u>	<u>139</u>	<u>385</u>	<u>1713</u>	<u>3839</u>	<u>3894</u>	<u>451</u>	<u>59</u>	<u>40</u>
	B	<u>0</u>	<u>63</u>	<u>112</u>	<u>87</u>	<u>112</u>	<u>367</u>	<u>1755</u>	<u>3969</u>	<u>3852</u>	<u>148</u>	<u>11</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>64</u>	<u>0</u>	<u>79</u>	<u>310</u>	<u>1271</u>	<u>2958</u>	<u>2448</u>	<u>0</u>	<u>0</u>	<u>0</u>
2	A	<u>31</u>	<u>116</u>	<u>157</u>	<u>99</u>	<u>202</u>	<u>349</u>	<u>1552</u>	<u>4386</u>	<u>4403</u>	558	91	74
	B	<u>0</u>	<u>110</u>	<u>149</u>	<u>128</u>	<u>147</u>	<u>325</u>	<u>1645</u>	<u>4599</u>	<u>4443</u>	300	48	26
	C	<u>0</u>	<u>47</u>	<u>130</u>	<u>0</u>	<u>120</u>	<u>294</u>	<u>1179</u>	<u>3559</u>	2686	30	0	0
3	A	<u>34</u>	<u>39</u>	<u>46</u>	<u>34</u>	<u>42</u>	<u>117</u>	<u>1175</u>	<u>4362</u>	<u>4215</u>	811	194	<u>93</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>1170</u>	<u>4467</u>	<u>4209</u>	566	91	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>721</u>	<u>3533</u>	<u>2764</u>	287	<u>0</u>	<u>0</u>
4	A	<u>0</u>	<u>6</u>	<u>9</u>	<u>14</u>	<u>26</u>	<u>131</u>	<u>1274</u>	<u>3885</u>	<u>4160</u>	<u>301</u>	0	0
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>91</u>	<u>1408</u>	<u>3983</u>	<u>4128</u>	<u>0</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>931</u>	<u>2938</u>	<u>2437</u>	<u>0</u>	<u>0</u>	<u>0</u>

The upstream Vidler transmountain diversion could have varying effects (tables 22 through 26) on the flow at Craig. For the historical condition with 100 percent of transmountain diversions (table 22), the 5-year low flow (80-percent exceedence probability) could decrease to zero for 3 months. Simulated historical monthly streamflows at the 100-percent water-use allocation (table 26) could also be significantly reduced by inclusion of the Vidler transmountain diversion.

Model-simulated historical monthly streamflows for control point 25 (confluence of Yampa River and Milk Creek) are presented in tables 27 through 31. This site is located approximately 10 river miles upstream from the damsite of the proposed Juniper Reservoir (fig. 1).

At the confluence of the Yampa River and Milk Creek, the flow statistics are similar to the upstream Yampa River at Craig, Colo. (control point 15), with only the addition of flow from Milk Creek and return flow from Craig Reservoir diversions. Reservoir-development options 1 and 2 were similar in effect, with less mean annual flow for option 2 due to additional reservoir storage upstream. For reservoir-development option 3, the larger flow statistics reflect the Juniper and Cross Mountain Reservoir downstream demands. In reservoir-development option 4, the downstream demands were nonexistent, and the flow statistics decreased at this site. There also was a decrease in flow statistics as the allocation percentages increased (tables 28 through 31), but to a much smaller degree. The absence of a downstream demand could allow more water to be retained in Craig Reservoir and other upstream reservoirs and less water to be released.

Table 27.--*Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek), for simulated historical conditions and with 100 percent of transmountain diversions*

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than simulated historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	150	278	286	223	275	564	2349	5571	5088	794	125	133
B	122	279	289	267	273	565	2373	5696	4996	498	99	133
C	76	218	259	109	261	528	1763	4409	3240	147	43	32
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	<u>71</u>	<u>174</u>	<u>200</u>	<u>144</u>	<u>197</u>	<u>486</u>	<u>1965</u>	<u>5180</u>	<u>4701</u>	<u>539</u>	<u>62</u>	<u>65</u>
B	<u>26</u>	<u>195</u>	<u>211</u>	<u>189</u>	<u>194</u>	<u>487</u>	<u>1982</u>	<u>5305</u>	<u>4605</u>	<u>235</u>	<u>23</u>	<u>18</u>
C	<u>4</u>	<u>38</u>	<u>170</u>	<u>33</u>	<u>183</u>	<u>450</u>	<u>1451</u>	<u>4018</u>	<u>2849</u>	<u>11</u>	<u>4</u>	<u>4</u>

Table 28.--Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 27 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	156	<u>237</u>	<u>251</u>	<u>206</u>	<u>231</u>	<u>494</u>	<u>2180</u>	<u>4749</u>	<u>4517</u>	<u>779</u>	176	164
	B	125	<u>228</u>	<u>258</u>	<u>226</u>	<u>230</u>	<u>491</u>	<u>2235</u>	<u>4753</u>	<u>4416</u>	<u>493</u>	150	<u>132</u>
	C	106	<u>180</u>	<u>222</u>	125	<u>218</u>	<u>464</u>	<u>1634</u>	<u>3694</u>	<u>2936</u>	250	121	<u>108</u>
2	A	<u>137</u>	<u>236</u>	<u>247</u>	246	<u>232</u>	<u>447</u>	<u>2085</u>	<u>5301</u>	<u>5007</u>	805	162	162
	B	<u>104</u>	<u>237</u>	<u>248</u>	212	<u>222</u>	<u>440</u>	<u>2125</u>	<u>5451</u>	<u>4957</u>	<u>496</u>	147	137
	C	<u>100</u>	<u>173</u>	<u>217</u>	<u>104</u>	<u>204</u>	<u>418</u>	<u>1519</u>	<u>4219</u>	<u>3166</u>	<u>171</u>	104	104
3	A	175	283	321	266	304	<u>486</u>	<u>1982</u>	<u>4751</u>	<u>4758</u>	900	265	236
	B	141	285	320	300	302	<u>485</u>	<u>2027</u>	<u>4791</u>	<u>4664</u>	594	248	193
	C	127	224	300	161	275	<u>456</u>	<u>1473</u>	<u>3773</u>	<u>2924</u>	333	191	158
4	A	<u>48</u>	<u>136</u>	<u>187</u>	<u>149</u>	<u>207</u>	<u>413</u>	<u>1908</u>	<u>5071</u>	<u>4947</u>	<u>718</u>	<u>75</u>	<u>76</u>
	B	<u>15</u>	<u>138</u>	<u>200</u>	<u>189</u>	<u>206</u>	<u>410</u>	<u>1945</u>	<u>5015</u>	<u>4859</u>	<u>404</u>	<u>46</u>	<u>44</u>
	C	<u>8</u>	<u>41</u>	<u>162</u>	<u>41</u>	<u>188</u>	<u>382</u>	<u>1457</u>	<u>3917</u>	<u>3113</u>	<u>63</u>	<u>35</u>	<u>22</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>142</u>	<u>212</u>	<u>226</u>	<u>189</u>	<u>207</u>	<u>471</u>	<u>2083</u>	<u>4643</u>	<u>4417</u>	<u>693</u>	162	149
	B	<u>116</u>	<u>205</u>	<u>234</u>	<u>205</u>	<u>208</u>	<u>469</u>	<u>2137</u>	<u>4621</u>	<u>4307</u>	<u>401</u>	135	122
	C	<u>104</u>	<u>147</u>	<u>195</u>	117	<u>188</u>	<u>438</u>	<u>1534</u>	<u>3599</u>	<u>2838</u>	<u>154</u>	116	<u>104</u>
2	A	121	214	226	224	211	<u>427</u>	<u>1985</u>	<u>5194</u>	<u>4904</u>	<u>728</u>	154	149
	B	104	217	228	191	<u>200</u>	<u>420</u>	<u>2020</u>	<u>5352</u>	<u>4845</u>	<u>401</u>	144	128
	C	56	148	195	71	<u>183</u>	<u>397</u>	<u>1417</u>	<u>4121</u>	<u>3036</u>	<u>118</u>	104	<u>100</u>
3	A	161	<u>255</u>	299	248	283	<u>465</u>	<u>1875</u>	<u>4646</u>	<u>4656</u>	821	250	220
	B	130	<u>251</u>	300	279	283	<u>464</u>	<u>1909</u>	<u>4654</u>	<u>4545</u>	505	235	180
	C	117	<u>182</u>	273	153	<u>255</u>	<u>436</u>	<u>1364</u>	<u>3680</u>	<u>2850</u>	266	184	146
4	A	<u>41</u>	<u>95</u>	<u>143</u>	<u>127</u>	<u>184</u>	<u>393</u>	<u>1810</u>	<u>4973</u>	<u>4850</u>	<u>644</u>	<u>66</u>	<u>63</u>
	B	<u>12</u>	<u>71</u>	<u>173</u>	<u>167</u>	<u>186</u>	<u>390</u>	<u>1847</u>	<u>4917</u>	<u>4761</u>	<u>307</u>	<u>41</u>	<u>29</u>
	C	<u>8</u>	<u>48</u>	<u>51</u>	<u>16</u>	<u>169</u>	<u>363</u>	<u>1359</u>	<u>3820</u>	<u>3015</u>	<u>51</u>	<u>35</u>	<u>22</u>

Table 29.--Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 27 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	150	235	256	208	232	494	2166	4713	4488	767	175	157
	B	124	228	261	231	232	490	2232	4691	4379	482	149	132
	C	105	182	238	126	217	465	1625	3691	2900	235	122	106
2	A	128	233	246	243	231	447	2094	5278	4985	795	159	155
	B	104	236	247	210	220	439	2116	5439	4921	488	144	131
	C	74	172	215	100	202	417	1534	4214	3142	159	104	100
3	A	159	250	327	274	310	473	1882	4659	4682	934	333	244
	B	139	247	328	311	312	474	1944	4662	4521	640	330	217
	C	116	196	312	186	282	433	1346	3714	2851	374	270	172
4	A	47	110	164	151	210	417	1909	4957	4915	702	83	74
	B	17	85	195	190	210	414	1949	4932	4785	392	70	44
	C	13	8	90	41	192	386	1464	3846	3077	92	66	40
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	120	181	201	166	192	446	1969	4511	4284	612	142	128
	B	111	169	206	185	188	446	2034	4488	4172	293	130	115
	C	98	115	161	111	152	412	1447	3489	2713	119	104	104
2	A	93	192	204	138	252	410	1901	5071	4785	668	143	123
	B	101	184	204	171	180	400	1906	5253	4722	335	134	122
	C	10	129	175	16	165	378	1356	4018	2955	112	100	47
3	A	140	205	283	233	263	419	1678	4436	4462	813	293	217
	B	121	210	287	255	267	428	1656	4418	4289	518	285	200
	C	102	122	262	150	232	372	1258	3500	2789	306	213	158
4	A	33	61	86	98	125	335	1713	4762	4720	582	76	56
	B	17	11	75	134	160	365	1753	4736	4589	197	70	41
	C	13	8	11	11	11	251	1268	3650	2882	92	66	40

Table 30.--Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 27 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>128</u>	<u>217</u>	<u>239</u>	<u>206</u>	<u>242</u>	<u>483</u>	<u>2188</u>	<u>4709</u>	<u>4462</u>	<u>770</u>	167	143
	B	<u>120</u>	<u>209</u>	<u>240</u>	<u>221</u>	<u>231</u>	<u>487</u>	<u>2230</u>	<u>4749</u>	<u>4371</u>	<u>489</u>	153	127
	C	<u>58</u>	<u>147</u>	<u>200</u>	117	<u>188</u>	<u>423</u>	<u>1724</u>	<u>3687</u>	<u>2907</u>	<u>230</u>	110	53
2	A	<u>103</u>	<u>221</u>	<u>237</u>	<u>231</u>	<u>223</u>	<u>447</u>	<u>2093</u>	<u>5281</u>	<u>4967</u>	<u>798</u>	<u>148</u>	<u>131</u>
	B	<u>102</u>	<u>225</u>	<u>238</u>	<u>204</u>	<u>216</u>	<u>441</u>	<u>2127</u>	<u>5512</u>	<u>4929</u>	<u>494</u>	<u>149</u>	<u>112</u>
	C	<u>12</u>	<u>158</u>	<u>199</u>	<u>61</u>	<u>193</u>	<u>416</u>	<u>1544</u>	<u>4194</u>	<u>3151</u>	<u>166</u>	69	<u>41</u>
3	A	132	177	210	179	203	488	<u>1782</u>	<u>4789</u>	<u>4660</u>	1071	402	263
	B	143	181	266	203	239	432	<u>1802</u>	<u>5042</u>	<u>4606</u>	869	413	273
	C	21	11	11	11	11	158	<u>1341</u>	<u>3661</u>	<u>3090</u>	518	339	150
4	A	<u>41</u>	<u>76</u>	<u>128</u>	<u>139</u>	<u>191</u>	<u>419</u>	<u>1910</u>	<u>4912</u>	<u>4888</u>	<u>687</u>	<u>104</u>	<u>71</u>
	B	<u>21</u>	<u>13</u>	<u>151</u>	<u>192</u>	<u>211</u>	<u>414</u>	<u>1952</u>	<u>4890</u>	<u>4751</u>	<u>362</u>	<u>102</u>	<u>57</u>
	C	<u>17</u>	<u>8</u>	<u>11</u>	<u>11</u>	<u>157</u>	<u>388</u>	<u>1468</u>	<u>3779</u>	<u>3058</u>	<u>132</u>	98	<u>57</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>58</u>	<u>123</u>	<u>147</u>	<u>111</u>	<u>159</u>	<u>409</u>	<u>1763</u>	<u>3911</u>	<u>3989</u>	<u>514</u>	<u>96</u>	<u>76</u>
	B	<u>40</u>	<u>120</u>	<u>136</u>	<u>113</u>	<u>139</u>	<u>389</u>	<u>1804</u>	<u>4033</u>	<u>3943</u>	<u>191</u>	<u>92</u>	<u>52</u>
	C	<u>0</u>	<u>60</u>	<u>109</u>	<u>70</u>	<u>103</u>	<u>353</u>	<u>1411</u>	<u>3028</u>	<u>2541</u>	<u>54</u>	<u>24</u>	<u>0</u>
2	A	<u>63</u>	<u>159</u>	<u>183</u>	<u>122</u>	<u>232</u>	<u>384</u>	<u>1826</u>	<u>4983</u>	<u>4684</u>	<u>624</u>	<u>110</u>	<u>92</u>
	B	<u>23</u>	<u>159</u>	<u>180</u>	<u>158</u>	<u>162</u>	<u>377</u>	<u>1823</u>	<u>5171</u>	<u>4672</u>	<u>333</u>	<u>106</u>	<u>76</u>
	C	<u>4</u>	<u>97</u>	<u>153</u>	<u>11</u>	<u>136</u>	<u>337</u>	<u>1256</u>	<u>3904</u>	<u>2861</u>	<u>108</u>	<u>20</u>	<u>4</u>
3	A	<u>97</u>	<u>126</u>	<u>148</u>	<u>118</u>	<u>141</u>	<u>276</u>	<u>1616</u>	<u>4544</u>	<u>4424</u>	916	336	201
	B	<u>94</u>	<u>93</u>	<u>151</u>	<u>91</u>	<u>140</u>	<u>346</u>	<u>1537</u>	<u>4850</u>	<u>4423</u>	663	347	202
	C	<u>9</u>	<u>11</u>	<u>11</u>	<u>11</u>	<u>11</u>	<u>30</u>	<u>1089</u>	<u>3334</u>	<u>2926</u>	426	201	<u>25</u>
4	A	<u>32</u>	<u>27</u>	<u>42</u>	<u>51</u>	<u>78</u>	<u>247</u>	<u>1587</u>	<u>4619</u>	<u>4595</u>	<u>532</u>	<u>102</u>	<u>61</u>
	B	<u>21</u>	<u>11</u>	<u>11</u>	<u>11</u>	<u>35</u>	<u>326</u>	<u>1649</u>	<u>4597</u>	<u>4457</u>	<u>144</u>	<u>102</u>	<u>57</u>
	C	<u>17</u>	<u>8</u>	<u>8</u>	<u>8</u>	<u>11</u>	<u>30</u>	<u>1175</u>	<u>3486</u>	<u>2765</u>	<u>132</u>	<u>98</u>	<u>57</u>

Table 31.--Summary of simulated historical monthly streamflows, control point 25 (confluence of Yampa River and Milk Creek), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 27 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>99</u>	<u>207</u>	<u>223</u>	<u>213</u>	<u>263</u>	<u>480</u>	<u>2208</u>	<u>4728</u>	<u>4456</u>	<u>758</u>	<u>132</u>	<u>111</u>
	B	<u>75</u>	<u>213</u>	<u>203</u>	<u>201</u>	<u>233</u>	<u>450</u>	<u>2261</u>	<u>4745</u>	<u>4363</u>	<u>480</u>	<u>119</u>	<u>86</u>
	C	<u>32</u>	<u>140</u>	<u>185</u>	<u>126</u>	<u>171</u>	<u>409</u>	<u>1725</u>	<u>3727</u>	<u>2915</u>	<u>222</u>	<u>37</u>	<u>24</u>
2	A	<u>74</u>	<u>193</u>	<u>220</u>	<u>216</u>	<u>214</u>	<u>428</u>	<u>2054</u>	<u>5284</u>	<u>4964</u>	<u>799</u>	<u>137</u>	<u>114</u>
	B	<u>28</u>	<u>191</u>	<u>212</u>	<u>183</u>	<u>203</u>	<u>433</u>	<u>2134</u>	<u>5477</u>	<u>4936</u>	<u>486</u>	<u>131</u>	<u>74</u>
	C	<u>4</u>	<u>127</u>	<u>187</u>	<u>43</u>	<u>174</u>	<u>369</u>	<u>1524</u>	<u>4180</u>	<u>3152</u>	<u>173</u>	<u>17</u>	<u>8</u>
3	A	<u>83</u>	<u>78</u>	<u>88</u>	<u>101</u>	<u>109</u>	<u>337</u>	<u>1846</u>	<u>5054</u>	<u>4825</u>	<u>1177</u>	<u>376</u>	<u>181</u>
	B	<u>26</u>	<u>11</u>	<u>11</u>	<u>15</u>	<u>17</u>	<u>222</u>	<u>1858</u>	<u>5215</u>	<u>4785</u>	<u>937</u>	<u>437</u>	<u>60</u>
	C	<u>10</u>	<u>8</u>	<u>11</u>	<u>8</u>	<u>11</u>	<u>53</u>	<u>1277</u>	<u>3959</u>	<u>3390</u>	<u>607</u>	<u>65</u>	<u>8</u>
4	A	<u>40</u>	<u>51</u>	<u>96</u>	<u>128</u>	<u>166</u>	<u>403</u>	<u>1912</u>	<u>4866</u>	<u>4857</u>	<u>671</u>	<u>133</u>	<u>78</u>
	B	<u>26</u>	<u>11</u>	<u>38</u>	<u>183</u>	<u>209</u>	<u>412</u>	<u>1956</u>	<u>4868</u>	<u>4723</u>	<u>296</u>	<u>133</u>	<u>75</u>
	C	<u>22</u>	<u>8</u>	<u>11</u>	<u>11</u>	<u>11</u>	<u>368</u>	<u>1469</u>	<u>3772</u>	<u>3025</u>	<u>172</u>	<u>129</u>	<u>75</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>36</u>	<u>87</u>	<u>123</u>	<u>114</u>	<u>154</u>	<u>418</u>	<u>1883</u>	<u>4358</u>	<u>4078</u>	<u>477</u>	<u>67</u>	<u>47</u>
	B	<u>8</u>	<u>73</u>	<u>123</u>	<u>100</u>	<u>125</u>	<u>396</u>	<u>1921</u>	<u>4369</u>	<u>3978</u>	<u>170</u>	<u>16</u>	<u>14</u>
	C	<u>4</u>	<u>10</u>	<u>75</u>	<u>11</u>	<u>91</u>	<u>344</u>	<u>1342</u>	<u>3345</u>	<u>2520</u>	<u>11</u>	<u>4</u>	<u>4</u>
2	A	<u>43</u>	<u>129</u>	<u>169</u>	<u>112</u>	<u>217</u>	<u>382</u>	<u>1722</u>	<u>4905</u>	<u>4587</u>	<u>585</u>	<u>100</u>	<u>80</u>
	B	<u>8</u>	<u>118</u>	<u>162</u>	<u>140</u>	<u>158</u>	<u>361</u>	<u>1789</u>	<u>5067</u>	<u>4547</u>	<u>325</u>	<u>53</u>	<u>36</u>
	C	<u>4</u>	<u>55</u>	<u>142</u>	<u>11</u>	<u>135</u>	<u>328</u>	<u>1277</u>	<u>3813</u>	<u>2766</u>	<u>42</u>	<u>8</u>	<u>4</u>
3	A	<u>53</u>	<u>51</u>	<u>58</u>	<u>46</u>	<u>56</u>	<u>151</u>	<u>1362</u>	<u>4952</u>	<u>4524</u>	<u>987</u>	<u>269</u>	<u>137</u>
	B	<u>15</u>	<u>11</u>	<u>11</u>	<u>11</u>	<u>15</u>	<u>44</u>	<u>1339</u>	<u>5083</u>	<u>4409</u>	<u>449</u>	<u>141</u>	<u>42</u>
	C	<u>8</u>	<u>8</u>	<u>8</u>	<u>8</u>	<u>11</u>	<u>26</u>	<u>856</u>	<u>3989</u>	<u>3010</u>	<u>459</u>	<u>12</u>	<u>8</u>
4	A	<u>30</u>	<u>19</u>	<u>22</u>	<u>26</u>	<u>40</u>	<u>165</u>	<u>1462</u>	<u>4475</u>	<u>4469</u>	<u>489</u>	<u>133</u>	<u>78</u>
	B	<u>26</u>	<u>11</u>	<u>11</u>	<u>11</u>	<u>15</u>	<u>125</u>	<u>1546</u>	<u>4477</u>	<u>4332</u>	<u>184</u>	<u>133</u>	<u>75</u>
	C	<u>22</u>	<u>8</u>	<u>8</u>	<u>8</u>	<u>11</u>	<u>30</u>	<u>1042</u>	<u>3381</u>	<u>2634</u>	<u>172</u>	<u>129</u>	<u>75</u>

Model-simulated historical monthly streamflows for control point 18 (Yampa River near Maybell, Colo.) are presented in tables 32 through 36. This site is located downstream from the proposed Juniper Reservoir and approximately 1 mi east of the town of Maybell (fig. 1). In comparison to streamflow-gaging-station measured data, simulated historical mean monthly streamflows for historical (1927-76) conditions without transmountain diversions (table 32) range from +6 to -23 percent and have an average absolute variation of 7 percent. These simulated historical flow statistics were generally lower than the calculated flow statistics during July, August, and September. All monthly flow values in tables 32 through 36 less than the corresponding historical monthly flow values are underscored.

Table 32.--*Summary of monthly streamflows, control point 18 (Yampa River near Maybell, Colo.), for simulated historical conditions, including 100 percent of transmountain diversions, and for historical conditions*

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	352	337	313	290	323	713	2794	6228	5277	1210	291	200
B	323	322	295	277	287	575	2616	5962	5331	1043	246	158
C	219	239	259	245	259	523	1840	4376	3644	459	110	81
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	<u>273</u>	<u>233</u>	<u>227</u>	<u>212</u>	<u>245</u>	<u>635</u>	<u>2410</u>	<u>5837</u>	<u>4891</u>	<u>955</u>	<u>228</u>	<u>132</u>
B	<u>236</u>	<u>230</u>	<u>216</u>	<u>199</u>	<u>209</u>	<u>497</u>	<u>2225</u>	<u>5571</u>	<u>4940</u>	<u>743</u>	<u>178</u>	<u>83</u>
C	<u>146</u>	<u>81</u>	<u>171</u>	<u>167</u>	<u>182</u>	<u>445</u>	<u>1449</u>	<u>3985</u>	<u>3253</u>	<u>331</u>	<u>72</u>	<u>22</u>
<u>HISTORICAL STREAMFLOWS CALCULATED FROM GAGING-STATION RECORDS</u>												
A	353	351	296	274	323	675	2647	6208	5472	1331	378	245
B	324	324	276	266	299	608	2755	6210	5315	1200	328	202
C	191	248	202	207	247	428	1544	4322	3546	545	197	137

Table 33.--Summary of simulated historical monthly streamflows, control point 18 (Yampa River near Maybell, Colo.), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 32 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	466	551	575	593	548	397	517	3034	3406	886	208	309
	B	505	578	596	606	575	418	200	2533	3165	805	200	326
	C	398	496	544	551	517	263	200	723	1586	696	200	262
2	A	485	573	594	586	556	397	525	3433	3891	902	204	306
	B	516	595	610	603	585	423	200	3151	3615	804	200	323
	C	414	523	566	547	503	266	200	753	1930	714	200	262
3	A	485	573	594	586	556	382	588	3191	3694	906	203	309
	B	516	595	610	603	585	418	200	2919	3350	813	200	327
	C	414	523	566	547	503	243	200	895	1753	721	200	260
4	A	250	196	213	217	255	562	2353	5728	5137	1132	241	143
	B	205	180	207	209	222	436	2217	5473	5204	953	200	102
	C	147	97	160	170	191	396	1539	3959	3547	379	105	44
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	455	546	576	590	544	384	458	2749	3260	872	208	306
	B	497	571	599	601	571	417	200	1872	3067	796	200	323
	C	360	495	558	551	500	265	200	717	1179	686	200	245
2	A	470	549	577	586	550	394	457	3153	3761	888	205	305
	B	510	579	595	592	566	424	200	2603	3511	803	200	322
	C	382	508	552	546	504	267	200	749	1733	691	200	257
3	A	481	565	586	582	557	382	508	2902	3565	888	204	308
	B	516	593	607	601	582	414	200	2214	3245	809	200	327
	C	388	516	554	546	516	246	200	727	1537	685	200	258
4	A	243	154	170	194	232	542	2255	5630	5039	1058	232	130
	B	200	130	188	190	196	416	2119	5375	5106	856	190	79
	C	145	31	49	139	171	376	1442	3861	3449	365	103	33

Table 34.--Summary of simulated historical monthly streamflows, control point 18 (Yampa River near Maybell, Colo.), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 32 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>291</u>	395	474	549	530	405	282	1518	1775	277	200	200
	B	<u>304</u>	431	527	573	556	426	200	591	1502	200	200	200
	C	<u>200</u>	240	395	469	449	322	200	271	200	200	200	200
2	A	<u>304</u>	409	479	537	534	410	283	1804	2416	281	200	200
	B	<u>323</u>	466	526	546	552	414	200	718	1919	200	200	200
	C	<u>200</u>	245	384	447	418	338	200	287	246	200	200	200
3	A	<u>319</u>	444	523	542	527	395	305	1550	2093	278	200	200
	B	<u>350</u>	511	565	547	554	430	200	542	1644	200	200	200
	C	<u>200</u>	254	467	477	446	294	200	200	232	200	200	200
4	A	<u>249</u>	<u>169</u>	<u>191</u>	<u>218</u>	<u>258</u>	<u>566</u>	<u>2354</u>	<u>5615</u>	<u>5105</u>	<u>1116</u>	<u>249</u>	<u>141</u>
	B	<u>205</u>	<u>158</u>	<u>210</u>	<u>213</u>	<u>225</u>	<u>440</u>	<u>2224</u>	<u>5331</u>	<u>5182</u>	<u>925</u>	<u>210</u>	<u>93</u>
	C	<u>150</u>	<u>31</u>	<u>88</u>	<u>164</u>	<u>194</u>	<u>400</u>	<u>1546</u>	<u>3893</u>	<u>3511</u>	<u>406</u>	<u>134</u>	<u>42</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>261</u>	343	448	528	553	383	243	1106	1299	266	200	200
	B	<u>213</u>	<u>312</u>	498	554	561	403	200	417	287	200	200	200
	C	<u>200</u>	<u>200</u>	295	439	495	286	200	200	200	200	200	200
2	A	<u>280</u>	362	462	520	543	400	240	1456	1911	272	200	200
	B	<u>277</u>	363	507	544	561	402	200	696	1634	200	200	200
	C	<u>200</u>	<u>200</u>	343	428	478	305	200	291	200	200	200	200
3	A	<u>295</u>	396	484	526	525	394	252	1179	1585	270	200	200
	B	<u>322</u>	448	535	558	559	427	200	424	668	200	200	200
	C	<u>200</u>	<u>200</u>	382	451	456	278	200	231	200	200	200	200
4	A	<u>235</u>	<u>120</u>	<u>112</u>	<u>165</u>	<u>173</u>	<u>484</u>	<u>2159</u>	<u>5419</u>	<u>4909</u>	<u>996</u>	<u>242</u>	<u>123</u>
	B	<u>196</u>	<u>78</u>	<u>85</u>	<u>169</u>	<u>167</u>	<u>384</u>	<u>2028</u>	<u>5139</u>	<u>4986</u>	<u>760</u>	<u>208</u>	<u>73</u>
	C	<u>128</u>	<u>9</u>	<u>9</u>	<u>117</u>	<u>12</u>	<u>288</u>	<u>1351</u>	<u>3698</u>	<u>3315</u>	<u>370</u>	<u>134</u>	<u>39</u>

Table 35.--Summary of simulated historical monthly streamflows, control point 18 (Yampa River near Maybell, Colo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 32 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>141</u>	<u>141</u>	<u>204</u>	<u>389</u>	<u>389</u>	<u>291</u>	<u>266</u>	<u>343</u>	<u>420</u>	<u>200</u>	<u>180</u>	<u>134</u>
	B	<u>200</u>	<u>200</u>	<u>200</u>	<u>381</u>	<u>471</u>	<u>329</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>
2	A	<u>145</u>	<u>163</u>	<u>277</u>	<u>328</u>	<u>402</u>	<u>367</u>	<u>216</u>	<u>548</u>	<u>649</u>	<u>200</u>	<u>192</u>	<u>166</u>
	B	<u>200</u>	<u>200</u>	<u>214</u>	<u>310</u>	<u>478</u>	<u>416</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
	C	<u>0</u>	<u>0</u>	<u>200</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
3	A	<u>145</u>	<u>160</u>	<u>220</u>	<u>281</u>	<u>318</u>	<u>258</u>	<u>189</u>	<u>478</u>	<u>510</u>	<u>200</u>	<u>192</u>	<u>173</u>
	B	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>325</u>	<u>280</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
4	A	<u>243</u>	<u>135</u>	<u>154</u>	<u>207</u>	<u>239</u>	<u>568</u>	<u>2355</u>	<u>5570</u>	<u>5077</u>	<u>1101</u>	<u>271</u>	<u>139</u>
	B	<u>204</u>	<u>78</u>	<u>152</u>	<u>205</u>	<u>219</u>	<u>444</u>	<u>2227</u>	<u>5272</u>	<u>5151</u>	<u>898</u>	<u>233</u>	<u>91</u>
	C	<u>130</u>	<u>9</u>	<u>9</u>	<u>162</u>	<u>185</u>	<u>400</u>	<u>1549</u>	<u>3837</u>	<u>3489</u>	<u>446</u>	<u>166</u>	<u>56</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>100</u>	<u>110</u>	<u>161</u>	<u>186</u>	<u>270</u>	<u>274</u>	<u>262</u>	<u>264</u>	<u>289</u>	<u>187</u>	<u>136</u>	<u>114</u>
	B	<u>100</u>	<u>0</u>	<u>200</u>	<u>100</u>	<u>220</u>	<u>297</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
2	A	<u>132</u>	<u>160</u>	<u>217</u>	<u>283</u>	<u>320</u>	<u>266</u>	<u>232</u>	<u>384</u>	<u>439</u>	<u>192</u>	<u>173</u>	<u>132</u>
	B	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>307</u>	<u>271</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>
3	A	<u>128</u>	<u>151</u>	<u>184</u>	<u>199</u>	<u>253</u>	<u>211</u>	<u>133</u>	<u>421</u>	<u>343</u>	<u>188</u>	<u>176</u>	<u>131</u>
	B	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>216</u>	<u>200</u>	<u>200</u>	<u>229</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>
4	A	<u>234</u>	<u>86</u>	<u>69</u>	<u>118</u>	<u>126</u>	<u>396</u>	<u>2032</u>	<u>5277</u>	<u>4784</u>	<u>946</u>	<u>268</u>	<u>128</u>
	B	<u>189</u>	<u>36</u>	<u>15</u>	<u>122</u>	<u>113</u>	<u>350</u>	<u>1885</u>	<u>4979</u>	<u>4858</u>	<u>690</u>	<u>213</u>	<u>81</u>
	C	<u>130</u>	<u>9</u>	<u>9</u>	<u>9</u>	<u>9</u>	<u>39</u>	<u>1239</u>	<u>3544</u>	<u>3195</u>	<u>410</u>	<u>166</u>	<u>58</u>

Table 36.--Summary of simulated historical monthly streamflows,
control point 18 (Yampa River near Maybell, Colo.),
with 100 percent of agricultural and no transmountain diversions,
and with 100 percent of both agricultural and transmountain diversions, and
including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 32 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	<u>48</u>	<u>108</u>	<u>124</u>	<u>272</u>	<u>348</u>	<u>189</u>	<u>268</u>	<u>200</u>	<u>210</u>	<u>164</u>	<u>75</u>	<u>53</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>440</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
2	A	<u>65</u>	<u>80</u>	<u>126</u>	<u>213</u>	<u>298</u>	<u>298</u>	<u>169</u>	<u>292</u>	<u>288</u>	<u>176</u>	<u>106</u>	<u>72</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>241</u>	<u>249</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
3	A	<u>60</u>	<u>82</u>	<u>78</u>	<u>103</u>	<u>144</u>	<u>162</u>	<u>113</u>	<u>275</u>	<u>281</u>	<u>180</u>	<u>110</u>	<u>72</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
4	A	<u>242</u>	<u>110</u>	<u>122</u>	<u>195</u>	<u>214</u>	<u>552</u>	<u>2357</u>	<u>5523</u>	<u>5047</u>	<u>1085</u>	<u>300</u>	<u>145</u>
	B	<u>202</u>	<u>59</u>	<u>65</u>	<u>202</u>	<u>217</u>	<u>440</u>	<u>2228</u>	<u>5220</u>	<u>5132</u>	<u>860</u>	<u>244</u>	<u>95</u>
	C	<u>135</u>	<u>9</u>	<u>9</u>	<u>118</u>	<u>67</u>	<u>369</u>	<u>1549</u>	<u>3817</u>	<u>3469</u>	<u>450</u>	<u>197</u>	<u>74</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	<u>31</u>	<u>33</u>	<u>63</u>	<u>143</u>	<u>123</u>	<u>181</u>	<u>283</u>	<u>200</u>	<u>192</u>	<u>108</u>	<u>60</u>	<u>28</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>	<u>0</u>
2	A	<u>52</u>	<u>90</u>	<u>76</u>	<u>124</u>	<u>228</u>	<u>299</u>	<u>167</u>	<u>229</u>	<u>264</u>	<u>145</u>	<u>73</u>	<u>48</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>250</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>	<u>0</u>
3	A	<u>45</u>	<u>66</u>	<u>54</u>	<u>80</u>	<u>95</u>	<u>80</u>	<u>89</u>	<u>267</u>	<u>222</u>	<u>152</u>	<u>76</u>	<u>50</u>
	B	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>
	C	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>200</u>	<u>200</u>	<u>0</u>	<u>0</u>	<u>0</u>
4	A	<u>232</u>	<u>78</u>	<u>49</u>	<u>93</u>	<u>88</u>	<u>313</u>	<u>1907</u>	<u>5132</u>	<u>4659</u>	<u>905</u>	<u>300</u>	<u>145</u>
	B	<u>182</u>	<u>32</u>	<u>9</u>	<u>70</u>	<u>20</u>	<u>178</u>	<u>1740</u>	<u>4829</u>	<u>4740</u>	<u>669</u>	<u>244</u>	<u>95</u>
	C	<u>124</u>	<u>9</u>	<u>9</u>	<u>9</u>	<u>9</u>	<u>32</u>	<u>1046</u>	<u>3426</u>	<u>3078</u>	<u>450</u>	<u>197</u>	<u>74</u>

Juniper Reservoir, a large agricultural diversion, is located upstream from the Yampa River at Maybell location. The assumed agricultural diversion simulated for Juniper Reservoir would divert as much as eight times the amount of water as the upstream Vidler tunnel transmountain diversion. Yampa River near Maybell (control point 18) is also the streamflow-gaging site and index station for streamflow from the Yampa River for the Colorado River Compact of 1948. This agreement requires that 5,000,000 acre-ft of water per 10-year period be delivered from the Yampa River basin upstream, which represents an approximate continuous flow of 690 ft³/s.

For the Yampa River near Maybell site, the Juniper Reservoir is included for reservoir-development options 1, 2, and 3 (table 2) and results in more regulated flows than option 4 (tables 33 through 36). Reservoir-development option 4 without Juniper Reservoir could follow a reduced annual-flow pattern similar to the historical flows (tables 32 and 33).

For reservoir-development options 1, 2, and 3, simulated historical 50-year median monthly flows quickly drop to the desired flow of 200 ft³/s. The 80-percent exceedence value dropped to zero for 3 or more months at the 75-percent allocation percentage (table 35). Realistically, if any substantial flow is to be maintained in the Yampa River at this location, reservoir-development options 1, 2, and 3 would be restricted to the 50-percent agricultural water-use allocation or less.

At the 100-percent allocation level, the Vidler transmountain diversion alone could cause an approximate 12-percent reduction in flow, as seen in table 32. When combined with the large irrigation diversion from this site (options 1, 2, and 3), the Vidler transmountain diversion could increase the number of zero-flow occurrences as the percentage of water-use allocation increases and could reduce the possibility of maintaining a desired flow of 200 ft³/s (tables 33 through 36).

Model-simulated historical monthly streamflows for control point 19 (Yampa River near Lily, Colo.) are presented in tables 37 through 41. This site is located downstream from the proposed Juniper and Cross Mountain Reservoirs (fig. 1) and is approximately 2 mi upstream from the confluence of the Little Snake River. All monthly flow statistics in tables 37 through 41 less than the corresponding historical-flow statistics are underscored.

Table 37.--Summary of simulated historical monthly streamflows,
control point 19 (Yampa River near Lily, Colo.),
for historical conditions and with 100 percent of transmountain diversions

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	411	398	364	337	379	831	3260	7311	6220	1440	357	240
B	377	374	337	320	332	666	3033	7037	6305	1247	304	195
C	253	283	294	288	304	605	2060	5137	4315	556	142	104
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	<u>332</u>	<u>293</u>	<u>278</u>	<u>259</u>	<u>301</u>	<u>753</u>	<u>2876</u>	<u>6920</u>	<u>5833</u>	<u>1185</u>	<u>293</u>	<u>172</u>
B	<u>292</u>	<u>283</u>	<u>257</u>	<u>242</u>	<u>254</u>	<u>588</u>	<u>2642</u>	<u>6646</u>	<u>5914</u>	<u>951</u>	<u>235</u>	<u>182</u>
C	<u>177</u>	<u>117</u>	<u>211</u>	<u>204</u>	<u>226</u>	<u>527</u>	<u>1669</u>	<u>4746</u>	<u>3924</u>	<u>401</u>	<u>111</u>	<u>42</u>

Table 38.--Summary of simulated historical monthly streamflows, control point 19 (Yampa River near Lily, Colo.), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 37 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	624	622	642	663	622	471	942	4394	4841	1861	712	664
	B	654	644	661	676	652	486	583	3826	4528	1720	689	678
	C	547	581	614	630	592	344	382	1720	2633	1720	670	630
2	A	632	630	643	659	629	481	950	4788	5331	1875	711	660
	B	660	655	662	674	650	492	619	4413	4978	1720	690	677
	C	562	593	617	620	593	351	390	1720	3186	1720	656	635
3	A	633	632	646	650	620	473	1053	4550	5132	1869	715	661
	B	661	657	663	674	653	490	659	3985	4712	1720	697	678
	C	563	594	618	620	593	356	450	1720	2985	1720	657	634
4	A	309	256	266	264	311	680	2819	6811	6079	1364	306	183
	B	253	228	248	248	265	529	2641	6548	6179	1157	257	126
	C	181	137	205	206	236	471	1759	4618	4218	463	142	75
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	624	622	642	663	622	463	859	4105	4693	1851	709	664
	B	654	644	661	676	652	477	530	3314	4430	1720	688	678
	C	547	581	614	630	592	344	367	1720	2522	1720	670	630
2	A	631	627	643	660	628	481	860	4506	5199	1862	708	660
	B	660	646	661	673	648	493	564	3875	4875	1720	689	677
	C	562	592	616	620	597	348	368	1720	2779	1720	656	632
3	A	633	630	644	649	620	473	953	4263	4999	1857	712	661
	B	661	652	663	674	651	490	627	3641	4608	1720	696	678
	C	563	594	618	620	593	351	443	1720	2643	1720	657	633
4	A	302	215	223	241	288	660	2721	6713	5982	1290	297	170
	B	247	184	229	228	243	510	2544	6450	6081	1059	250	107
	C	181	75	90	181	216	452	1662	4521	4120	442	142	57

Table 39.--Summary of simulated historical monthly streamflows, control point 19 (Yampa River near Lily, Colo.), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 37 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	615	622	642	663	622	468	565	3061	3721	1881	1252	834
	B	644	644	661	676	652	477	344	1720	3262	1754	1275	830
	C	537	581	614	630	592	344	344	1720	1798	1720	1230	809
2	A	622	622	631	650	624	475	589	3344	4374	1884	1256	834
	B	652	644	650	650	637	486	415	1737	3698	1754	1275	830
	C	561	596	606	607	586	344	344	1720	1993	1720	1235	809
3	A	623	626	638	645	617	470	643	3136	4049	1882	1259	834
	B	652	639	659	665	640	481	491	1819	3439	1753	1275	829
	C	563	598	609	624	591	344	344	1720	1832	1720	1235	808
4	A	308	229	244	265	314	684	2820	6698	6047	1348	314	182
	B	253	208	252	251	269	533	2646	6396	6156	1128	271	119
	C	186	75	123	204	239	475	1766	4547	4182	500	173	70
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	615	622	642	651	631	461	489	2654	3198	1868	1215	832
	B	644	644	661	676	653	469	344	1720	2394	1738	1273	830
	C	537	581	614	623	597	344	344	1720	1720	1720	1218	809
2	A	621	617	625	636	626	472	538	2972	3840	1875	1239	834
	B	644	627	644	652	643	483	430	1720	3407	1748	1275	830
	C	556	594	592	608	592	344	344	1720	1787	1720	1223	809
3	A	622	621	631	639	613	467	576	2731	3506	1873	1239	833
	B	644	628	651	662	637	481	444	1720	2769	1745	1274	829
	C	556	597	604	607	591	344	344	1720	1720	1720	1223	808
4	A	294	180	165	213	229	602	2625	6502	5852	1228	308	163
	B	243	132	124	208	215	474	2451	6200	5961	960	265	104
	C	177	54	46	145	59	374	1571	4351	3986	482	173	70

Table 40.--Summary of simulated historical monthly streamflows, control point 19 (Yampa River near Lily, Colo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 37 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	606	608	539	574	514	381	372	1986	2538	2398	1707	972
	B	634	613	638	655	617	385	344	1720	2270	2410	1792	1128
	C	527	580	501	568	188	206	344	1720	1720	2256	1760	613
2	A	613	595	579	568	522	433	381	2197	2820	2418	1773	1060
	B	631	605	595	596	596	460	344	1720	2434	2416	1792	1133
	C	560	563	536	522	522	344	344	1720	1720	2284	1761	1106
3	A	614	598	564	529	450	349	368	2070	2635	2396	1782	1084
	B	631	602	575	584	562	345	344	1720	2371	2416	1792	1132
	C	560	562	517	398	57	88	344	1720	1720	2230	1761	1105
4	A	302	196	208	254	295	686	2821	6653	6020	1333	336	179
	B	247	132	194	249	266	536	2650	6348	6125	1102	296	122
	C	170	57	48	197	229	476	1769	4519	4160	522	205	87
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	567	575	475	388	385	333	367	1858	2303	2362	1497	886
	B	623	613	617	570	546	344	344	1720	2146	2406	1785	1116
	C	514	567	57	41	46	96	344	1720	1720	2233	918	595
2	A	567	563	521	498	459	376	380	1960	2518	2384	1672	937
	B	592	582	567	589	560	359	344	1720	2150	2408	1791	1128
	C	521	538	412	274	125	204	344	1720	1720	2201	1756	561
3	A	563	561	510	448	403	322	363	1928	2341	2352	1660	933
	B	599	580	563	552	527	344	344	1720	2059	2400	1792	1121
	C	525	539	479	68	51	85	344	1720	1720	2090	1756	571
4	A	293	147	122	165	182	514	2498	6359	5727	1178	334	168
	B	241	96	61	162	169	427	2314	6055	5832	872	291	121
	C	170	54	44	52	53	136	1462	4226	3866	522	205	87

Table 41.--Summary of simulated historical monthly streamflows, control point 19 (Yampa River near Lily, Colo.), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 37 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	496	476	<u>356</u>	405	446	<u>305</u>	<u>349</u>	1830	<u>2765</u>	2951	1343	775
	B	559	588	<u>354</u>	601	585	<u>284</u>	<u>344</u>	<u>1720</u>	<u>2730</u>	3130	1456	574
	C	394	<u>54</u>	<u>36</u>	<u>41</u>	<u>163</u>	<u>133</u>	<u>344</u>	<u>1720</u>	<u>2212</u>	3000	409	524
2	A	539	507	407	379	402	<u>384</u>	<u>353</u>	1909	<u>2776</u>	3000	1580	822
	B	571	558	498	523	519	<u>352</u>	<u>344</u>	<u>1720</u>	<u>2581</u>	3136	2277	523
	C	508	430	<u>132</u>	<u>41</u>	<u>51</u>	<u>186</u>	<u>344</u>	<u>1720</u>	<u>2074</u>	3035	439	461
3	A	532	507	389	<u>299</u>	<u>254</u>	<u>240</u>	<u>318</u>	<u>1863</u>	<u>2669</u>	3012	1655	838
	B	571	559	454	<u>191</u>	<u>65</u>	<u>143</u>	<u>344</u>	<u>1720</u>	<u>2427</u>	3135	2281	524
	C	505	430	<u>129</u>	<u>39</u>	<u>45</u>	<u>82</u>	<u>221</u>	<u>1720</u>	<u>1862</u>	3034	427	474
4	A	<u>301</u>	<u>170</u>	<u>175</u>	<u>242</u>	<u>270</u>	<u>670</u>	<u>2823</u>	<u>6606</u>	<u>5989</u>	<u>1317</u>	<u>365</u>	<u>185</u>
	B	<u>250</u>	<u>114</u>	<u>110</u>	<u>240</u>	<u>263</u>	<u>534</u>	<u>2654</u>	<u>6296</u>	<u>6106</u>	<u>1066</u>	<u>322</u>	<u>139</u>
	C	<u>175</u>	<u>54</u>	<u>46</u>	<u>150</u>	<u>128</u>	<u>458</u>	<u>1769</u>	<u>4517</u>	<u>4140</u>	<u>562</u>	236	<u>105</u>
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	452	357	<u>266</u>	<u>234</u>	<u>202</u>	<u>235</u>	<u>356</u>	1804	<u>2705</u>	2666	1091	633
	B	506	449	<u>64</u>	<u>51</u>	<u>62</u>	<u>171</u>	<u>344</u>	<u>1720</u>	<u>2041</u>	3045	463	563
	C	330	<u>45</u>	<u>35</u>	<u>36</u>	<u>45</u>	<u>82</u>	<u>344</u>	<u>1720</u>	<u>2120</u>	1885	398	409
2	A	490	441	<u>320</u>	<u>299</u>	<u>333</u>	<u>353</u>	<u>354</u>	1834	<u>2637</u>	2887	1230	687
	B	547	521	<u>322</u>	<u>85</u>	<u>218</u>	<u>344</u>	<u>344</u>	<u>1720</u>	<u>2450</u>	3118	931	490
	C	458	<u>124</u>	<u>43</u>	<u>36</u>	<u>46</u>	<u>137</u>	<u>344</u>	<u>1720</u>	<u>1893</u>	2404	344	405
3	A	504	448	<u>325</u>	<u>267</u>	<u>201</u>	<u>180</u>	<u>309</u>	1828	<u>2462</u>	2907	1269	736
	B	554	534	<u>381</u>	<u>57</u>	<u>59</u>	<u>112</u>	<u>344</u>	<u>1720</u>	<u>2387</u>	3133	1023	512
	C	466	<u>158</u>	<u>55</u>	<u>36</u>	<u>45</u>	<u>80</u>	<u>221</u>	<u>1720</u>	<u>1220</u>	2670	344	430
4	A	<u>291</u>	<u>138</u>	<u>100</u>	<u>140</u>	<u>144</u>	<u>431</u>	<u>2374</u>	<u>6215</u>	<u>5601</u>	<u>1135</u>	<u>365</u>	<u>185</u>
	B	<u>242</u>	<u>83</u>	<u>56</u>	<u>123</u>	<u>74</u>	<u>286</u>	<u>2168</u>	<u>5905</u>	<u>5715</u>	<u>865</u>	<u>322</u>	<u>139</u>
	C	<u>173</u>	<u>54</u>	<u>44</u>	<u>52</u>	<u>51</u>	<u>116</u>	<u>1296</u>	<u>4126</u>	<u>3749</u>	<u>550</u>	236	<u>105</u>

At the Yampa River near Lily site, the proposed Cross Mountain Reservoir is considered for reservoir-development options 1, 2, and 3 (table 2). Principally because of the possible large return flow from the Juniper Reservoir agricultural diversions, the monthly flow statistics at this site could reflect larger volumes than at the upstream site at Maybell (control point 18) (tables 33 through 36 and 38 through 41). The flow statistics for this site also could indicate a more highly regulated annual-flow hydrograph than the historical discharges for reservoir-development options 1, 2, and 3. Reservoir-development option 4 again followed more closely a historical annual-flow hydrograph because of the absence of the upstream Juniper and Cross Mountain Reservoirs. A hypothetical desired flow of 344 ft³/s, which is approximately equal to the historical summer average monthly flow, was established for this location. In many instances, the 344-ft³/s desired flow was not met, particularly for the 100-percent water-use allocation level (table 41). For example, in reservoir-development option 4 with the 25-, 50-, 75-, and 100-percent water-use allocations, both with and without the transmountain diversions, the desired flow was not met during at least 6 months of each year (tables 38 through 41).

Model-simulated historical monthly streamflows for control point 43 (Little Snake River near Baggs, Wyo.) are presented in tables 42 through 46. In comparison to the streamflow-gaging-station measured data, simulated monthly mean streamflows for historical conditions without proposed transmountain diversions range from -8 to +8 percent and have an average absolute variation of 6 percent. This indicates that the model can reasonably simulate historical conditions at this control point (fig. 1), which is located downstream from the proposed Hog Park transmountain diversion and the proposed Sandstone and Pot Hook Reservoirs.

For reservoir development in option 1 without the Hog Park transmountain diversion, no change in flow was noticed from the historical conditions (tables 42 through 46) because neither Pot Hook nor Sandstone Reservoirs were considered for this option. Since there were no diversions for option 1, the increase in allocation percentage similarly had no effect on the flow statistics (tables 42 through 46). In reservoir-development options 2, 3, and 4, both upstream reservoirs were considered and the flow statistics were reduced principally during the spring runoff of March, April, May, and June. Reservoir-development option-4 flow statistics were the most regular with less flow during the spring runoff and more flow during the summer and winter. By regulating the monthly flows at this location, additional flows also might be supplied during the low-flow months to the downstream Dinosaur National Monument.

Simulated historical streamflow statistics at control point 43 most significantly reflected the potential effects of proposed withdrawals by the Hog Park transmountain diversion during April through July. The effects of this diversion can most easily be seen in table 42 when 100-percent water-use allocation of transmountain diversion was added, resulting in zero flow for the month of July during many years.

Table 42.--Summary of monthly streamflows,
control point 43 (Little Snake River near Baggs, Wyo.),
for simulated historical conditions, including 100 percent
of transmountain diversions, and for historical conditions

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	64	93	83	77	96	285	1069	2296	1841	185	28	34
B	49	78	78	66	88	222	847	2268	1805	65	18	17
C	25	54	55	54	55	140	446	1369	889	21	8	10
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	64	93	83	77	96	285	<u>949</u>	<u>2168</u>	<u>1715</u>	<u>87</u>	28	34
B	49	78	78	66	88	222	<u>730</u>	<u>2140</u>	<u>1672</u>	<u>0</u>	18	17
C	25	54	55	54	55	140	<u>328</u>	<u>1241</u>	<u>761</u>	<u>0</u>	8	10
<u>HISTORICAL STREAMFLOWS CALCULATED FROM GAGING-STATION RECORDS</u>												
A	66	96	85	79	95	348	1017	2482	1890	196	26	37
B	50	86	78	74	88	260	920	2412	1806	80	14	6
C	17	54	55	55	56	159	576	1408	968	21	3	1

Table 43.--Summary of simulated historical monthly streamflows, control point 43 (Little Snake River near Baggs, Wyo.), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 42 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	1069	2296	1841	185	28	34
	B	49	78	78	66	88	222	847	2268	1805	65	18	17
	C	25	54	55	54	55	140	446	1369	889	21	8	10
2	A	56	86	82	81	98	273	1030	2299	1825	179	36	36
	B	38	76	78	69	88	210	803	2223	1791	57	24	21
	C	22	47	53	58	62	127	390	1260	873	30	22	20
3	A	54	84	79	77	96	275	1038	2302	1825	179	35	36
	B	35	71	76	68	85	213	814	2250	1791	57	23	21
	C	20	45	52	54	60	131	403	1307	873	30	22	19
4	A	67	100	94	88	94	243	800	2007	1803	248	345	202
	B	41	79	75	70	87	187	526	1826	1715	205	367	191
	C	17	49	51	50	55	135	251	1018	809	45	162	12
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	1037	2264	1809	153	28	34
	B	49	78	78	66	88	222	815	2236	1773	33	18	17
	C	25	54	55	54	55	140	414	1337	857	0	8	10
2	A	57	88	82	80	99	272	994	2264	1793	152	36	37
	B	48	80	78	70	90	209	766	2177	1759	25	24	22
	C	23	47	53	58	64	128	356	1220	841	10	22	19
3	A	55	85	80	79	95	274	1001	2267	1793	152	36	36
	B	42	76	76	68	84	213	778	2211	1759	25	23	21
	C	22	46	52	54	62	128	366	1245	841	10	22	19
4	A	66	101	94	86	94	245	767	1973	1773	232	341	191
	B	41	79	75	70	87	194	494	1794	1679	190	357	171
	C	17	49	51	54	60	138	219	986	777	20	159	8

Table 44.--Summary of simulated historical monthly streamflows, control point 43 (Little Snake River near Baggs, Wyo.), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 42 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	1069	2296	1841	185	28	34
	B	49	78	78	66	88	222	847	2268	1805	65	18	17
	C	25	54	55	54	55	140	446	1369	889	21	8	10
2	A	56	93	94	90	102	265	967	2256	1813	194	54	41
	B	40	89	85	92	89	205	751	2125	1779	78	45	26
	C	26	56	70	52	54	135	323	1206	860	59	45	26
3	A	54	90	87	83	97	267	980	2266	1813	194	54	41
	B	38	85	77	75	88	204	768	2142	1779	78	45	26
	C	21	49	58	58	57	136	364	1206	860	59	45	26
4	A	65	99	91	86	94	242	803	2004	1788	249	340	177
	B	40	80	75	70	87	187	528	1831	1695	217	355	141
	C	15	49	51	50	55	135	255	1022	821	65	146	12
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	1006	2232	1777	125	28	34
	B	49	78	78	66	88	222	783	2204	1741	2	18	17
	C	25	54	55	54	55	140	382	1305	825	0	8	10
2	A	56	98	100	92	101	266	896	2179	1750	142	54	41
	B	41	97	91	82	93	216	686	2033	1715	32	45	26
	C	22	59	68	56	60	134	276	1142	796	21	45	26
3	A	55	95	94	89	101	265	904	2186	1750	142	54	41
	B	39	94	84	78	92	203	687	2043	1715	32	45	26
	C	20	51	63	52	63	136	292	1142	796	21	45	26
4	A	64	101	91	83	94	247	738	1936	1726	213	330	164
	B	40	80	75	70	87	194	464	1767	1629	170	351	133
	C	15	49	51	55	56	138	191	958	757	21	146	8

Table 45.--Summary of simulated historical monthly streamflows, control point 43 (Little Snake River near Baggs, Wyo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 42 historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	1069	2296	1841	185	28	34
	B	49	78	78	66	88	222	847	2268	1805	65	18	17
	C	25	54	55	54	55	140	446	1369	889	21	8	10
2	A	55	120	141	134	118	259	874	2131	1793	216	76	54
	B	39	125	134	134	101	217	647	1789	1737	106	67	40
	C	20	62	84	73	62	130	317	1158	848	89	67	40
3	A	54	118	153	137	123	266	876	2109	1789	216	76	54
	B	40	125	161	143	106	222	634	1752	1737	106	67	40
	C	20	58	108	85	67	131	381	1158	848	89	67	40
4	A	61	99	89	84	94	242	805	2001	1778	255	322	157
	B	38	78	75	70	87	187	529	1835	1673	228	358	102
	C	16	49	51	50	55	138	258	1026	824	89	140	9
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	975	2200	1746	104	28	34
	B	49	78	78	66	88	222	751	2172	1709	0	18	17
	C	25	54	55	54	55	140	350	1273	793	0	8	10
2	A	74	126	149	124	125	267	776	1986	1694	141	80	65
	B	57	124	140	138	115	223	523	1690	1631	46	67	40
	C	22	61	111	62	73	143	255	1040	752	31	67	40
3	A	70	127	153	136	130	271	780	1968	1688	141	86	58
	B	56	128	154	148	118	223	522	1656	1607	46	67	40
	C	22	61	114	63	67	143	313	1031	752	31	67	40
4	A	59	103	88	81	94	251	709	1899	1682	196	311	148
	B	38	78	75	70	87	200	433	1739	1577	160	354	87
	C	16	49	51	55	56	138	174	930	723	31	140	8

Table 46.--Summary of simulated historical monthly streamflows, control point 43 (Little Snake River near Baggs, Wyo.), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 42 historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	1069	2296	1841	185	28	34
	B	49	78	78	66	88	222	847	2268	1805	75	18	17
	C	25	54	55	54	55	140	446	1369	889	21	8	10
2	A	88	142	143	113	109	256	843	2039	1772	239	99	76
	B	82	139	136	104	99	220	563	1784	1691	132	89	59
	C	23	71	82	60	54	114	342	1078	835	119	89	53
3	A	89	140	151	120	112	264	847	2020	1767	238	99	74
	B	82	139	150	106	100	215	548	1758	1691	132	89	58
	C	24	66	92	62	55	140	386	1078	835	119	89	53
4	A	58	99	86	82	94	241	808	1999	1769	264	296	139
	B	36	76	75	70	87	187	531	1839	1652	191	328	83
	C	15	49	51	50	55	138	261	1030	830	119	148	8
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	64	93	83	77	96	285	949	2168	1715	87	28	34
	B	49	78	78	66	88	222	730	2140	1677	0	18	17
	C	25	54	55	54	55	140	328	1241	761	0	8	10
2	A	102	141	137	110	112	250	737	1878	1641	145	106	95
	B	92	142	123	90	90	207	449	1630	1554	66	89	63
	C	39	64	70	58	62	107	302	884	707	47	89	53
3	A	95	148	146	114	115	271	741	1855	1636	144	103	87
	B	87	153	136	94	97	220	479	1630	1556	66	89	61
	C	39	66	68	56	67	140	300	874	707	47	89	53
4	A	58	105	85	78	95	254	683	1864	1641	184	286	131
	B	36	76	75	68	88	201	403	1711	1524	140	323	53
	C	15	49	51	55	56	139	177	889	702	48	136	7

Model-simulated historical monthly streamflow statistics for control point 41 (Yampa River near Deerlodge Park, Colo.) are presented in tables 47 through 51. This site is located downstream from the confluence of the Yampa and the Little Snake Rivers near the entrance to Dinosaur National Monument (fig. 1). Flow statistics given in tables 47 through 51 less than historical values are underscored. Although no streamflow record is available at this site, the historical simulated flow statistics should conform to the actual streamflows as there was close agreement for the nearest upstream streamflow-gaging stations, Yampa River at Maybell (control point 18) and Little Snake River near Lily (control point 42).

Table 47.--*Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.), for historical conditions and with 100 percent of transmountain diversions*

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than historical conditions without transmountain diversions]

FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
	OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
<u>SIMULATED HISTORICAL CONDITIONS</u>												
A	517	513	461	424	499	1223	4359	9932	8143	1721	424	295
B	458	483	445	402	435	933	4030	9408	8181	1410	340	248
C	279	343	361	346	375	853	2527	6688	5611	646	181	114
<u>SIMULATED HISTORICAL CONDITIONS WITH 100 PERCENT OF TRANSMOUNTAIN DIVERSIONS</u>												
A	<u>438</u>	<u>408</u>	<u>374</u>	<u>346</u>	<u>421</u>	<u>1145</u>	<u>3856</u>	<u>9413</u>	<u>7631</u>	<u>1368</u>	<u>361</u>	<u>227</u>
B	<u>363</u>	<u>400</u>	<u>367</u>	<u>324</u>	<u>357</u>	<u>855</u>	<u>3511</u>	<u>8890</u>	<u>7662</u>	<u>1029</u>	<u>281</u>	<u>160</u>
C	<u>211</u>	<u>189</u>	<u>267</u>	<u>264</u>	<u>297</u>	<u>775</u>	<u>2105</u>	<u>6169</u>	<u>5092</u>	<u>382</u>	<u>131</u>	<u>72</u>

Table 48.--Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.), with 25 percent of agricultural and no transmountain diversions, and with 25 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 47 simulated historical conditions]

OP- FLOW TION VALUES		MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	740	738	738	750	742	863	2052	7056	6837	2235	850	761
	B	750	750	750	750	750	750	1690	6130	6470	2030	806	750
	C	750	750	750	750	750	750	961	3484	3725	1869	750	750
2	A	740	738	738	750	751	860	2021	7452	7312	2244	857	760
	B	750	750	750	750	750	750	1656	6722	7039	2013	822	750
	C	750	750	750	750	750	750	924	3747	4040	1875	750	750
3	A	740	738	738	738	739	854	2131	7217	7113	2238	860	760
	B	750	750	750	750	750	750	1749	6403	6702	2013	827	750
	C	750	750	750	750	750	750	946	3631	3878	1875	750	750
4	A	419	378	373	361	429	1029	3649	9143	7955	1708	691	407
	B	339	330	347	333	367	750	3320	8726	8023	1303	750	393
	C	207	202	267	273	317	705	2058	6232	5443	750	750	97
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	740	738	738	750	742	855	1937	6735	6657	2194	847	761
	B	750	750	750	750	750	750	1587	5720	6125	1998	805	750
	C	750	750	750	750	750	750	922	3452	3676	1837	750	750
2	A	740	738	738	750	751	859	1894	7135	7148	2204	854	760
	B	750	750	750	750	750	750	1496	6379	6825	1981	820	750
	C	750	750	750	750	750	750	856	3415	3727	1855	750	750
3	A	740	738	738	738	738	853	1994	6896	6948	2199	857	760
	B	750	750	750	750	750	750	1645	5911	6549	1981	825	750
	C	750	750	750	750	750	750	910	3446	3665	1855	750	750
4	A	411	338	330	337	406	1012	3518	9011	7828	1618	678	383
	B	324	283	320	314	343	750	3189	8596	7894	1173	750	373
	C	207	142	161	242	294	686	1928	6103	5313	750	561	95

Table 49.--Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.), with 50 percent of agricultural and no transmountain diversions, and with 50 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 47 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	741	738	738	750	742	860	1685	5763	5790	2350	1461	972
	B	750	750	750	750	750	750	1558	4708	4870	2176	1459	948
	C	750	750	750	750	750	750	964	3433	3184	1963	1383	905
2	A	740	738	738	750	750	847	1607	6006	6416	2362	1491	980
	B	750	750	750	750	750	750	1388	4749	5485	2194	1491	948
	C	750	750	750	750	750	750	792	3344	3195	1998	1420	919
3	A	740	738	738	738	738	843	1675	5808	5091	2360	1494	980
	B	750	750	750	750	750	750	1410	4875	5157	2194	1491	947
	C	750	750	750	750	750	750	835	3349	3189	1998	1421	918
4	A	415	350	348	362	432	1032	3653	9026	7918	1693	694	380
	B	327	315	343	337	371	750	3321	8590	7998	1307	750	341
	C	211	142	190	281	319	709	2067	6191	5389	750	638	113
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	741	738	738	738	752	852	1546	5292	5204	2277	1423	971
	B	750	750	750	750	750	750	1471	4399	4343	2125	1459	948
	C	750	750	750	750	750	750	900	3308	3026	1907	1372	905
2	A	740	738	738	738	750	844	1485	5557	5819	2301	1474	980
	B	750	750	750	750	750	750	1283	4492	4802	2130	1485	948
	C	750	750	750	750	750	750	750	3280	3006	1963	1420	919
3	A	740	738	738	738	738	838	1530	5323	5484	2298	1474	980
	B	750	750	750	750	750	750	1318	4362	4459	2130	1485	947
	C	750	750	750	750	750	750	750	3280	2995	1963	1415	918
4	A	401	304	269	306	347	956	3392	8764	7660	1537	677	349
	B	316	244	235	288	327	750	3059	8331	7738	1123	750	318
	C	211	119	104	184	148	562	1807	5931	5129	750	574	108

Table 50.--Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.), with 75 percent of agricultural and no transmountain diversions, and with 75 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 47 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	743	723	635	661	634	772	1502	4728	4680	2960	1986	1152
	B	750	750	750	750	750	750	1356	4411	4326	2908	2047	1264
	C	750	750	637	750	298	583	974	3412	3226	2668	1978	750
2	A	741	738	733	712	664	799	1316	4774	4914	3012	2100	1260
	B	750	750	750	750	750	750	1168	4261	4373	2945	2099	1299
	C	750	750	750	750	750	750	750	3238	3049	2712	2039	1270
3	A	741	738	729	676	596	722	1306	4625	4725	2990	2109	1284
	B	750	750	750	750	750	750	1168	4141	4345	2944	2099	1301
	C	750	750	750	640	163	398	750	3170	3046	2665	2039	1269
4	A	405	316	310	348	413	1034	3656	8978	7880	1684	698	357
	B	326	244	311	339	368	750	3328	8515	7963	1300	750	299
	C	215	120	111	259	294	713	2071	6159	5356	750	678	112
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	703	691	571	475	505	725	1404	4504	4350	2844	1768	1061
	B	750	750	750	745	750	750	1260	4315	4166	2807	2030	1251
	C	750	750	169	110	131	371	878	3316	3130	2574	1150	750
2	A	715	711	682	632	608	750	1217	4392	4513	2903	2003	1149
	B	750	750	750	750	750	750	1045	4016	4154	2858	2097	1295
	C	750	750	667	450	243	567	750	3053	2948	2635	2034	750
3	A	705	711	675	594	557	700	1205	4342	4331	2871	1996	1136
	B	750	750	750	750	750	750	1044	3969	4058	2841	2097	1287
	C	750	750	750	171	137	360	750	2995	2945	2529	2034	750
4	A	395	272	223	256	300	871	3238	8584	7492	1471	684	339
	B	319	227	173	243	238	725	2935	8126	7574	1105	750	285
	C	215	119	104	147	133	378	1639	5770	4967	750	611	112

Table 51.--Summary of simulated historical monthly streamflows, control point 41 (Yampa River near Deerlodge Park, Colo.), with 100 percent of agricultural and no transmountain diversions, and with 100 percent of both agricultural and transmountain diversions, and including 100 percent of industrial and municipal diversions for all simulations

[FLOW VALUES: A=MEAN; B=MEDIAN; and C=80-PERCENT EXCEEDENCE. Underscored values are less than corresponding table 47 simulated historical conditions]

OP- TION	FLOW VALUES	MONTHLY FLOWS, IN CUBIC FEET PER SECOND											
		OCT.	NOV.	DEC.	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT
WITHOUT TRANSMOUNTAIN DIVERSIONS													
1	A	642	591	452	492	567	697	1490	4612	4980	3605	1681	989
	B	750	750	515	750	750	750	1367	4482	4856	3709	1759	750
	C	478	141	122	114	224	407	985	3452	3910	3450	750	750
2	A	710	672	563	502	535	746	1268	4434	4923	3703	1990	1080
	B	750	750	750	750	750	750	1083	4185	4643	3803	2648	750
	C	750	750	254	115	127	488	750	3228	3761	3571	817	750
3	A	703	670	553	429	390	610	1237	4369	4811	3718	2068	1094
	B	750	750	750	356	217	495	1066	4130	4596	3802	2651	750
	C	750	750	249	105	124	301	750	3137	3521	3571	784	750
4	A	402	291	275	335	388	1018	3661	8930	7841	1677	701	347
	B	322	239	231	328	365	750	3333	8422	7942	1320	750	284
	C	219	119	105	221	151	674	2075	6103	5348	750	637	130
WITH TRANSMOUNTAIN DIVERSIONS													
1	A	597	472	362	321	322	627	1377	4458	4794	3218	1419	840
	B	750	683	195	157	197	493	1239	4324	4667	3442	750	750
	C	444	111	104	101	116	301	857	3324	3501	2435	750	750
2	A	674	604	470	419	468	710	1163	4198	4652	3495	1646	959
	B	750	750	518	265	580	750	983	3922	4412	3660	1306	750
	C	750	255	136	102	131	372	750	3059	3169	2852	750	750
3	A	681	617	484	391	339	558	1122	4169	4472	3516	1681	1002
	B	750	750	588	183	182	424	938	3861	4297	3672	1429	750
	C	750	307	134	101	124	299	750	3009	3144	3113	750	750
4	A	391	266	199	228	263	792	3087	8404	7325	1415	690	338
	B	303	199	163	219	184	613	2809	7903	7423	1050	750	263
	C	210	119	104	132	131	340	1501	5584	4829	750	597	130

The Yampa River at Deerlodge Park is the last downstream control point in this simulation. As such, this location represents the total effect of all reservoir-development options, transmountain diversions, and water-use allocation on the outflow from the Yampa River basin. An average desired monthly streamflow of 750 ft³/s was specified at this control point. This was computed from a combination of the 690-ft³/s flow required by the Colorado River Compact of 1948 at the Maybell streamflow gage (control point 18) and the Little Snake River drainage input. Some consideration also was given to the proposed Wild and Scenic River designation within Dinosaur National Monument (H. J. Belisle, U.S. Bureau of Reclamation, written commun., 1976).

At this downstream point in the Yampa River basin, the streamflow statistics were similar for reservoir-development options 1, 2, and 3. Because of the size of the upstream Juniper and Cross Mountain Reservoirs and the other smaller proposed upstream reservoirs (table 2) and also because of the desired flow requirement at this location, the flow statistics indicated large regulated impacts for monthly flow values (tables 48 through 51). The desired flow of 750 ft³/s was maintained throughout reservoir-development options 1, 2, and 3 for water-use allocations at the 25- and 50-percent levels (tables 48 and 49). Several values less than the 750-ft³/s desired flow can be seen in tables 50 and 51 and at the 75- and 100-percent water-use allocation. A slight decline in flow was also noticed with progression from reservoir-development options 1, 2, and 3, due to increased proposed reservoir development upstream in the basin. Option 4 without Juniper and Cross Mountain Reservoirs reflected a fairly traditional annual hydrograph with slightly reduced levels of flow and appeared least affected by the water-use allocation percentage increases (tables 48 through 51). Because of the more traditional annual hydrograph (table 47), reservoir-development option 4, as well as the historical conditions, meets the hypothetical 750-ft³/s desired flow target for 6 or more months each year (tables 48 through 51).

The flow statistics with both Vidler and Hog Park transmountain diversions at the 100-percent allocation are presented in table 47. The combined effect can be easily noticed when compared to the historical flow statistics, but when included with reservoir-development options (tables 48 through 51), it has the effect of reducing the number of months that the desired flow is met for both the median and 5-year low-flow (80-percent exceedence) statistics.

SUMMARY

A total of 35 major reservoirs has been proposed for construction in the Yampa River basin to provide additional water for increasing industrial, irrigation, and municipal uses. In addition, two transmountain diversions have been proposed to transport water to the metropolitan areas of Denver, Colo., and Cheyenne, Wyo. A multireservoir-flow computer model was used to simulate the effects on streamflow of five potential options, including one representing historical conditions (no additional reservoir development) and four representing various degrees of reservoir and transmountain-diversion development. Various combinations of 17 of the larger proposed reservoirs and the 2 transmountain diversions were used in the model analysis.

Simulated monthly historical streamflows at 47 control points throughout the Yampa River basin were determined for the following conditions:

A. Historical conditions:

1. Historical conditions without any proposed diversions.
2. Historical conditions with 100 percent of proposed transmountain diversions.

B. Reservoir-development options 1 through 4:

1. Allocation of 25 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.
2. Allocation of 25 percent of total active reservoir storage for agricultural use with 25 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.
3. Allocation of 50 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.
4. Allocation of 50 percent of total active reservoir storage for agricultural use with 50 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.
5. Allocation of 75 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.
6. Allocation of 75 percent of total active reservoir storage for agricultural use with 75 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.
7. Allocation of 100 percent of total active reservoir storage for agricultural use without any transmountain diversions, and including 100 percent of industrial and municipal diversions.
8. Allocation of 100 percent of total active reservoir storage for agricultural use with 100 percent of proposed transmountain diversions, and including 100 percent of industrial and municipal diversions.

Results of this study were designed to demonstrate the application of a reservoir-modeling computer technique in helping to evaluate certain areas of concern for proposed reservoir development in the Yampa River basin. This study, as presented, is an extension of earlier reservoir-modeling work completed for the Yampa River basin (Adams and others, 1982). Results presented in this report are somewhat speculative because of assumptions which had to be made for model application and also because of the limited possible reservoir-development schemes considered for the study. The results, however, do present some possible impacts of the proposed sequential reservoir development in the Yampa River basin.

By varying the percentages of agricultural and transmountain diversions within each proposed reservoir-development option, lesser degrees of development than those currently (1979) proposed were simulated, thus providing results for a greater range of alternatives. The results of these simulations will provide water managers and planners with some insight on how proposed surface-water developments will affect minimum streamflows.

During partial model verification for the basin, the fit of the mean monthly streamflow statistics to streamflow-gaging-station records statistics was good to fair (5 to 20 percent). Comparisons between the main-stem Yampa River model results and streamflow-gaging-station record statistics show a decrease in model accuracy in the downstream direction from a minus 5-percent difference at Steamboat Springs to a minus 20-percent difference at the Craig or Maybell streamflow-gaging stations.

Model-simulation results for nine representative control points presented in this report are summarized below. Results for the remaining 38 control points may be obtained from the U.S. Geological Survey for the cost of computer and reproduction time.

For certain tributary locations--namely the Elk River near Trull (control point 38) and Trout Creek at mouth (control point 34)--the monthly flow statistics are far less affected by allocation percentages or development option than are those for the Yampa River main stem. Because some of these reservoirs were only operating at minimal storage levels during most of the period of record and could not fulfill their corresponding diversion allocations, the effects of these reservoirs on streamflow are minor. The transmountain diversions also have little effect at these two locations. In general, the 50-year monthly flow statistics for any tributary to the Yampa River exhibit regulated flow patterns only if that tributary had one or more reservoirs upstream.

Yampa River main-stem sites responded in different ways, depending on their location in the proposed reservoir system and other downstream and upstream demands. In general, all locations studied responded to increases in agricultural-diversion water-use allocation percentage and transmountain diversion with reduction in streamflow. In some instances, streamflow in certain reaches could be increased by releases from upstream reservoirs resulting from downstream reservoir demands.

The Vidler and Hog Park transmountain diversions had noticeable effects on most Yampa River main-stem sites. The Vidler transmountain diversion could affect all Yampa River locations downstream from Steamboat Springs, Colo., while the Hog Park diversion could affect all Little Snake River locations downstream from approximately Dixon, Wyo. Both diversions could affect the Yampa River near Deerlodge Park. The Steamboat Springs location is most highly affected by the Vidler transmountain diversion with lesser impact downstream.

Of the nine sites of interest presented in this report, three of the sites had some periods of projected zero flow for the 50-year monthly-flow simulation. The Steamboat Springs location had periods of zero flow when the Vidler transmountain diversion was included for reservoir-development options 3 and 4 at the proposed 25-percent water-use allocation and for all options at the 100-percent water-use allocation. The Craig location on the Yampa River had some zero-flow periods in reservoir-development option 4 at the 25-percent water-use allocation level, increasing to several instances of zero flow for all options at the 100-percent water-use allocation, both with and without the Vidler transmountain diversion. The Yampa River at Maybell maintained some flow until the irrigation water reached 75-percent water-use allocation. At this 75-percent water-use allocation, several zero-flow months occurred, especially during the low-flow season of summer and fall.

SELECTED REFERENCES

- Adams, D. B., Bauer, D. P., Dale, R. H., and Steele, T. D., 1982, Reservoir-development impacts on surface-water quantity and quality in the Yampa River basin, Colorado and Wyoming: U.S. Geological Survey Water-Resources Investigation 31-30 (in press).
- Banner & Associates, Inc., 1976, Proposed expansion of Cheyenne's Little Snake diversion facilities: First section of general report and reconnaissance report on Hog Park Reservoir enlargement, prepared for the City of Cheyenne, Wyo., Board of Public Utilities, 6 chaps. with 3 apps.
- Colorado River Water Conservation District, 1975, Federal Power Commission application for preliminary permit, Juniper-Cross Mountain project: Water-development proposal and supporting material, 7 p., app.
- Ficke, J. F., Adams, D. B., and Danielson, T. W., 1976, Evaporation for seven reservoirs in the Denver water-supply system, central Colorado: U.S. Geological Survey Water-Resources Investigations 76-114, 170 p.; available only from U.S. Department of Commerce, National Technical Information Service, Springfield, VA 22161, as report PB-265-323.
- Gray, S. L., McKean, J. R., and Weker, J. C., 1977, The economy of northwestern Colorado--Description and analysis: Final report submitted to U.S. Bureau of Land Management, Contract 52500-CT5-1019, 4 chaps., app.
- Knudsen, W. I., Jr., and Danielson, J. A., 1977, A discussion of legal and institutional constraints on energy-related water development in the Yampa River basin, northwestern Colorado: U.S. Geological Survey, Contract No. 14-08-0001-15075, December 1977, 20 p.
- Oak Creek Power Company, 1976, Oak Creek Water and Power Project, Colorado: Denver, Van Sickel & Associates, Inc., Consulting Engineers, January 1976, 22 p.

- Palmer, R. N., James, I. C., II, and Hirsch, R. M., 1977, Comparative assessment of water use and environmental implications of coal slurry pipelines: U.S. Geological Survey Open-File Report 77-698, 29 p.; also published in Hydrological Sciences Bulletin, v. 23, no. 4, December 1976, p. 455-469.
- Steele, T. D., 1976, Coal-resource development alternatives, residuals management, and impacts on the water resources of the Yampa River basin: Colorado and Wyoming: International Water Resources Association Symposium on Water Resources and Fossil Fuel Production, Dusseldorf, Germany, September 1976, Paper 28, 17 p.
- Steele, T. D., Bauer, D. P., Wentz, D. A., and Warner, J. W., 1979, The Yampa River basin, Colorado and Wyoming--A preview to expanded coal-resource development and its impacts on regional water resources: U.S. Geological Survey Water-Resources Investigations 78-126, 133 p.; available only from U.S. Department of Commerce, National Technical Information Service, Springfield, VA 22161, as report PB-303 815/AS.
- U.S. Army, Corps of Engineers, 1968, HEC-3, Reservoir systems analysis: Hydrological Engineering Center users manual no. 23-53, 86 p.
- U.S. Department of the Interior, 1976, Savery-Pot Hook project, Colorado and Wyoming--Draft environmental statement: U.S. Bureau of Reclamation, Upper Colorado Region, Salt Lake City, Utah, INT DES 76-37, September 27, 1976, 9 chaps., with attachments.
- Western Engineers, Inc., 1975, Yamcolo Reservoir project--Feasibility report: Grand Junction, Prepared for the Upper Yampa Water Conservancy District and the Colorado Water Conservation Board, November 1975, 8 chaps.
- Woodward-Clyde Consultants, 1977, Supplemental report to the U.S. Environmental Protection Agency of Lake Catamount Dam and Reservoir: Report for Pleasant Valley Investment Co., Steamboat Springs, Colo., No. 18914-16319, 58 p., app.

